

NOTE:
Please read all instructions
carefully before using this
product

Table of Contents

Safety Notice

Hardware Pack

Assembly Instruction

Parts List

Resistance Chart

Warranty

Ordering Parts

Model
MACH V


Retain This
Manual for
Reference

08-26-03

OWNER'S
MANUAL

IMPEX
FITNESS PRODUCTS

MARCY MAGNUM V HOME GYM

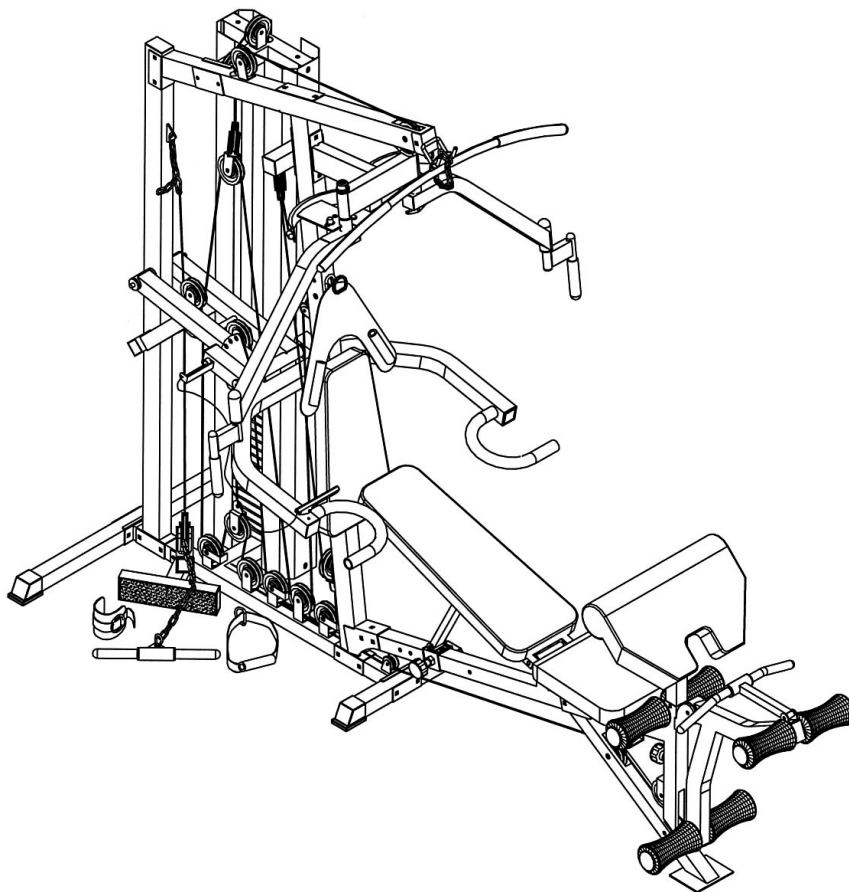

IMPEX FITNESS PRODUCTS

14777 DON JULIAN RD., CITY OF INDUSTRY, CA 91746

Tel: (800) 999-8899 Fax: (626) 961-9966

www.impex-fitness.com

info@impex-fitness.com

TABLE OF CONTENTS

BEFORE YOU BEGIN.....	1
IMPORTANT SAFETY NOTICE.....	2
HARDWARE PACK.....	3
ASSEMBLY INSTRUCTIONS.....	7
PARTS LIST.....	25
RESISTANCE CHART.....	27
WARRANTY.....	28
ORDERING PARTS.....	28

BEFORE YOU BEGIN

Thank you for selecting the MARCY MAGNUM V PERSONAL TRAINER by IMPEX FITNESS PRODUCTS. For your safety and benefit, read this manual carefully before using the machine. As a manufacturer, we are committed to provide you complete customer satisfaction. If you have any questions, or find there are missing or damaged parts, we guarantee you complete satisfaction through direct assistance from our factory. To avoid unnecessary delays, *please call our TOLL-FREE customer service number.* Our Customer Service Agents will provide immediate assistance to you.

Toll-Free Customer Service Number

1-800-999-8899

Mon. - Fri. 9 a.m. - 5 p.m. PST

www.impex-fitness.com

info@impex-fitness.com

IMPORTANT SAFETY NOTICE

PRECAUTIONS

This exercise machine is built for optimum safety. However, certain precautions apply whenever you operate a piece of exercise equipment. Be sure to read the entire manual before you assemble or operate your machine. In particular, note the following safety precautions:

1. **Keep children and pets away from the machine at all times. DO NOT leave children unattended in the same room with the machine.**
2. Only one person at a time should use the machine.
3. If the user experiences dizziness, nausea, chest pain, or any other abnormal symptoms, STOP the workout at once. CONSULT A PHYSICIAN IMMEDIATELY.
4. Position the machine on a clear, leveled surface. DO NOT use the machine near water or outdoors.
5. Keep hands away from all moving parts.
6. Always wear appropriate workout clothing when exercising. DO NOT wear robes or other clothing that could become caught in the machine. Running or aerobic shoes are also required when using the machine.
7. Use the machine only for its intended use as described in this manual. DO NOT use attachments not recommended by the manufacturer.
8. Do not place any sharp object around the machine.
9. Disabled person should not use the machine without a qualified person or physician in attendance.
10. Before using the machine to exercise, always do stretching exercises to properly warm up.
11. Never operate the machine if the machine is not functioning properly.


WARNING: BEFORE BEGINNING ANY EXERCISE PROGRAM, CONSULT YOUR PHYSICIAN. THIS IS ESPECIALLY IMPORTANT FOR INDIVIDUALS OVER THE AGE OF 35 OR PERSONS WITH PRE-EXISTING HEALTH PROBLEMS. READ ALL INSTRUCTIONS BEFORE USING ANY FITNESS EQUIPMENT. IMPEX INC. ASSUMES NO RESPONSIBILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE SUSTAINED BY OR THROUGH THE USE OF THIS PRODUCT.

SAVE THESE INSTRUCTIONS.


HARDWARE PACK



#32 9" Axle (Qty 1)




#110 M10 x 7 1/4" Hex Bolt (Qty 1)




#130 7" Axle (Qty 1)




#134 Short Chain (Qty2)

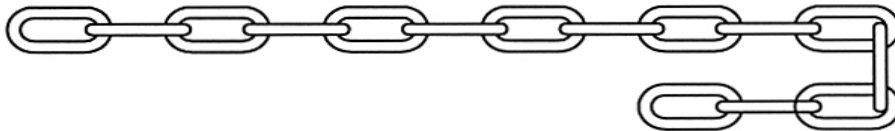


#135 Long Chain (Qty 1)

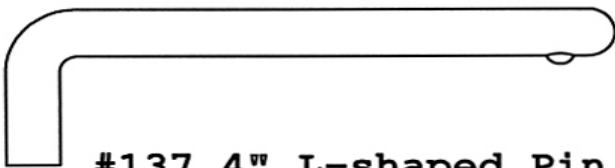


#137 4" L-shaped Pin (Qty 1)




#139 2 1/2" Axle (Qty 1)

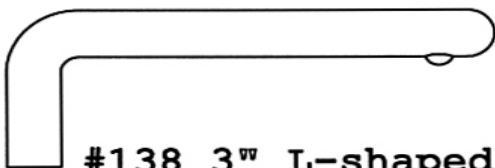


#138 3" L-shaped Pin (Qty 1)




#136 C-clip (Qty 6)

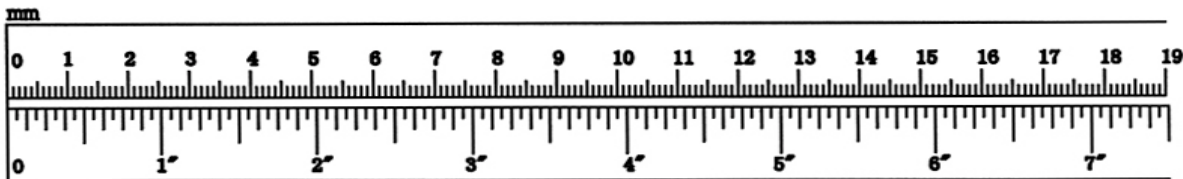


HARDWARE PACK




#107 M10 x 3 3/4" Carriage Bolt (Qty 2)




#108 M10 x 3 1/2" Carriage Bolt (Qty 2)




#109 M10 x 2 3/4" Carriage Bolt (Qty 20)




#116 M10 x 3" Allen Bolt (Qty 1)




#117 M10 x 2 1/2" Allen Bolt (Qty 5)




#113 M10 x 1 3/4" Allen Bolt (Qty 17)



#114 M10 x 1" Allen Bolt (Qty 4)




#120 M10 x 3/4" Allen Bolt (Qty 13)

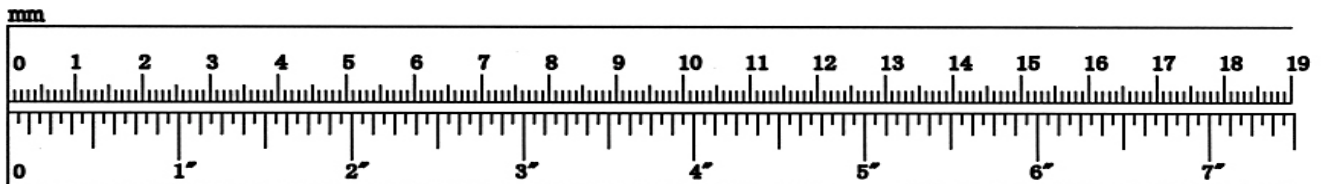

HARDWARE PACK



#119 M10 x 1 3/4" Allen Bolt (Qty 1)
(Full Thread)



#115 M8 x 3 3/8" Allen Bolt (Qty 2)




#122 M8 x 3/4" Allen Bolt (Qty 4)




#121 M8 x 5/8" Allen Bolt (Qty 2)




#82 M8 Hex Socket Screw (Qty 2)




#111 M6 x 1 5/8" Hex Bolt (Qty 2)




#112 M6 x 1 3/8" Hex Bolt (Qty 4)

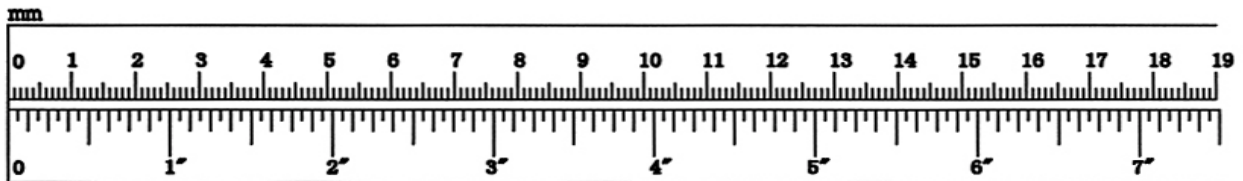


HARDWARE PACK



#70 $\text{\O} \frac{7}{8}$ " Pulley Bushing
(Qty 8)




#67 $\text{\O} 1$ " Bushing
(Qty 18)




#78 $\text{\O} 1 \frac{3}{8}$ " Ring Cap
(Qty 2)




#69 $\text{\O} \frac{3}{8}$ " Bushing
(Qty 2)




#133 $\text{\O} 1 \frac{1}{2}$ " x $\text{\O} \frac{1}{2}$ " Washer
(Qty 4)




#79 $\text{\O} 1 \frac{1}{2}$ " x $\text{\O} \frac{3}{4}$ " Washer
(Qty 2)



#131 $\text{\O} 1 \frac{1}{2}$ " x $\text{\O} \frac{5}{8}$ " Washer
(Qty 2)



#132 $\text{\O} 1 \frac{1}{2}$ " x $\text{\O} 1$ " Washer
(Qty 2)



#124 $\text{\O} \frac{3}{4}$ " Washer
(Qty 84)



#125 $\text{\O} \frac{5}{8}$ " Washer
(Qty 8)



#128 M10 Aircraft Nut (Qty 51)




#127 M12 Aircraft Nut (Qty 4)



#126 $\text{\O} \frac{1}{2}$ " Washer
(Qty 4)



#129 M6 Aircraft Nut (Qty 2)

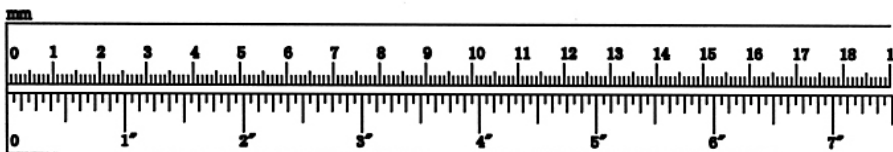

ASSEMBLY INSTRUCTION


Tools Required Assembling the Machine: Two Adjustable Wrenches and Allen Wrenches

NOTE: It is strongly recommended this machine be assembled by two or more people to avoid possible injury.

STEP 1 (See Diagram 1)


- A.) Attach two $\text{Ø } 2 \frac{1}{2}$ " Rubber Bumpers (#88) to the holes on the Main Base Frame (#1).
- B.) Align the holes and insert two Guide Rods (#10) into the holes. Secure the Guide Rods from the Bottom of Main Base Frame with two M10 x $\frac{3}{4}$ " Allen Bolts (#120) and $\text{Ø } \frac{3}{4}$ " Washers (#124).

DIAGRAM 1

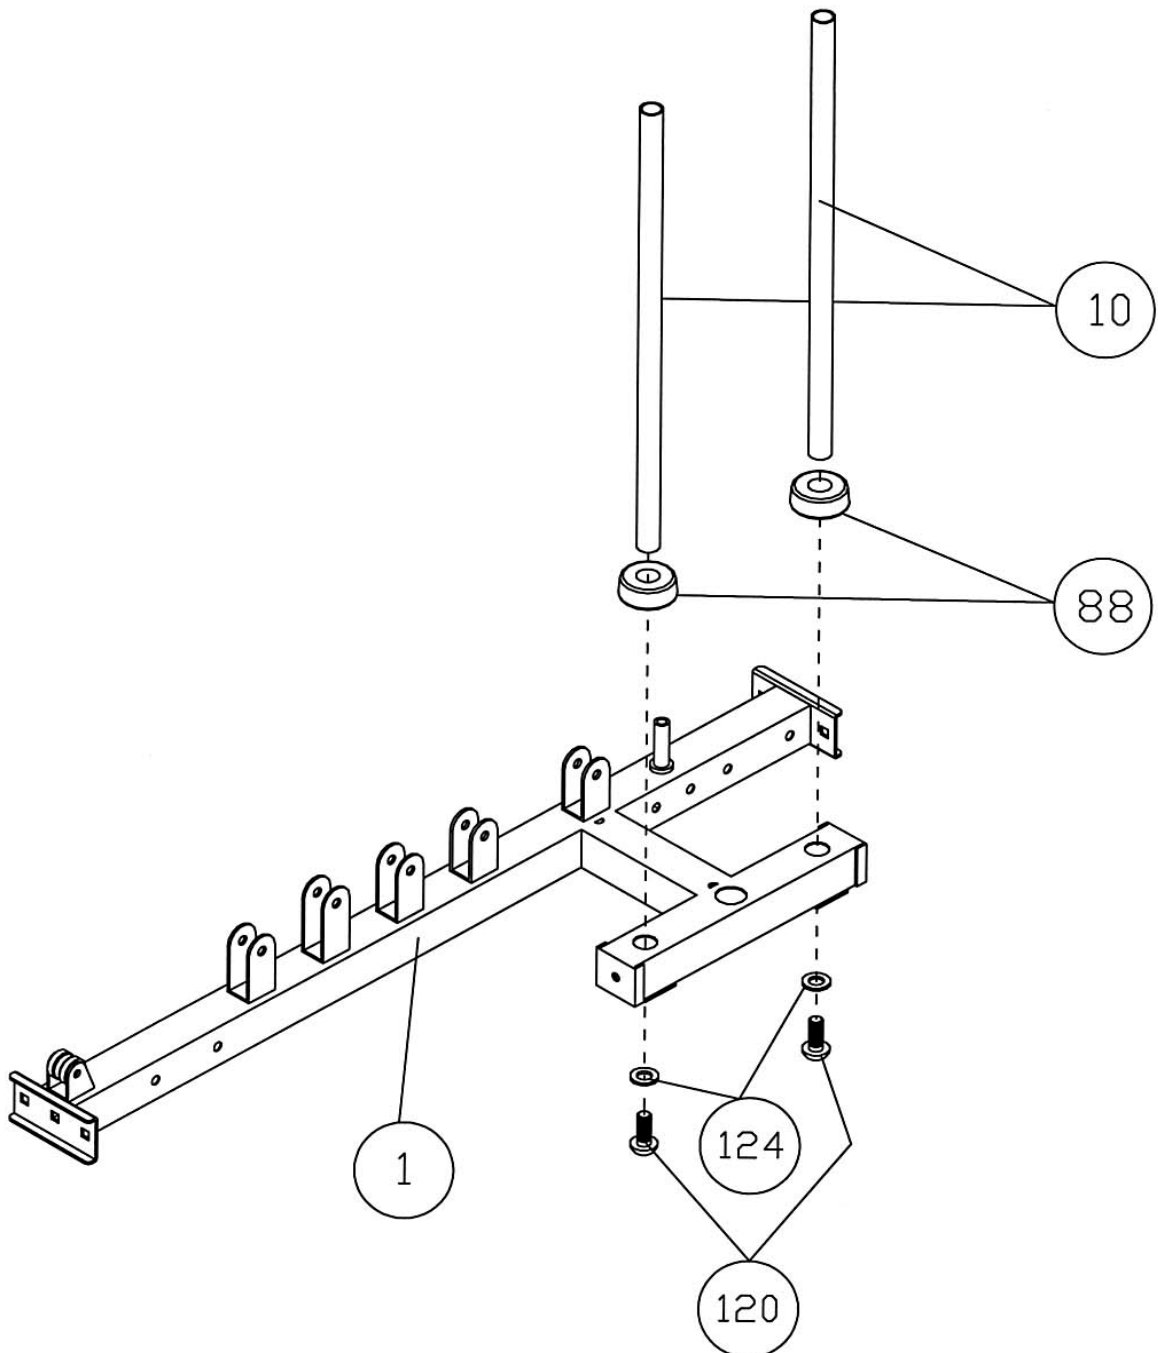

STEP 2 (See Diagram 2)


- A.) Connect the Main Base Frame (#1) to both the Front & Rear Stabilizers (#5 & 4). Secure each end with two M10 x 2 3/4" Carriage Bolts (#109), one 4 3/4" x 2" Bracket (#44), two Ø 3/4" Washers (#124), and two M10 Aircraft Nuts (#128). DO NOT tighten all the nuts and bolts yet.
- B.) Attach the Rear & Front Vertical Beams (#6 & 7) to the Main Base Frame (#1). Secure each Beam with two M10 x 2 3/4" Carriage Bolts (#109), Ø 3/4" Washers (#124), and M10 Aircraft Nuts (#128).
- C.) Place the Upper Frame (#8) onto the Front & Rear Vertical Beams. Secure the Upper Frame to Rear Vertical Frame with two M10 x 2 3/4" Carriage Bolts (#109), Ø 3/4" Washers (#124), and M10 Aircraft Nuts (#128).
- D.) Secure the Upper Frame to the Front Vertical Beam with two M10 x 3 1/2" Carriage Bolts (#108), one 6 1/4" x 2" Bracket (#43), two Ø 3/4" Washers (#124), and two M10 Aircraft Nuts (#128).
- E.) Attach the Lat Bar Holder (#31) to the front of the Upper Frame (#8). Secure it with one M10 x 2 3/4" Carriage Bolt (#109), Ø 3/4" Washer (#124), and M10 Aircraft Nut (#128).
- F.) Securely tighten all Bolts and Nuts.

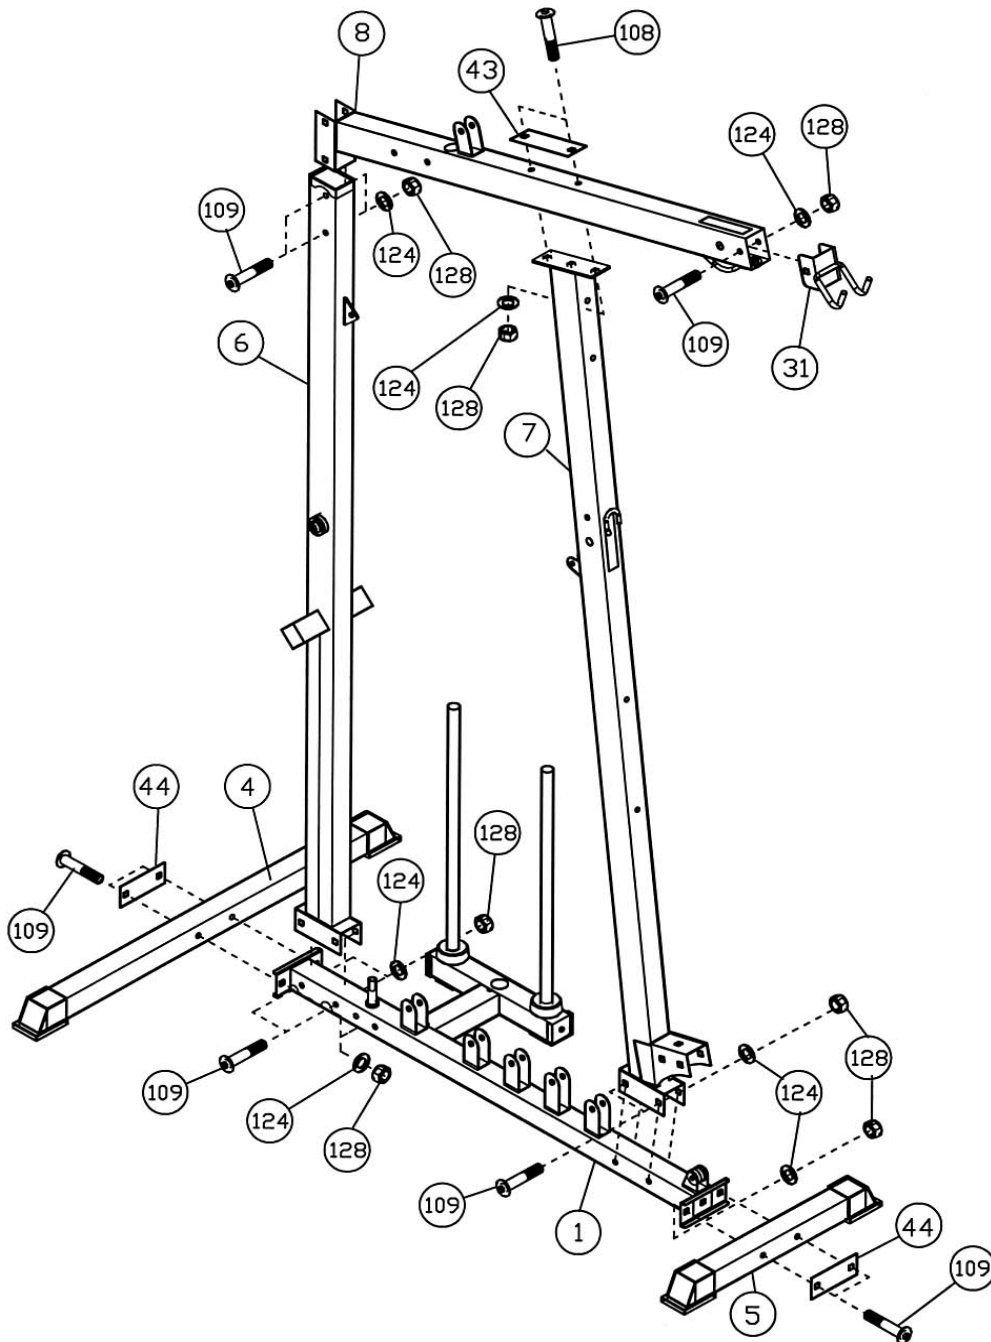

STEP 3 (See Diagram 3)


- A.) Place the Swivel Frame (#11) onto the axle on the Main Base Frame (#1). Secure it with one M10 x $\frac{3}{4}$ " Allen Bolt (#120) and $\text{\O} \frac{3}{4}$ " Washer (#124).
- B.) Attach the Foot Support (#12) to the Main Base Frame. Attach the 4" x 2" Bracket (#42) to the opposite side on the Main Base Frame. Secure them with one M10 x 2 $\frac{3}{4}$ " Carriage Bolt (#109), $\text{\O} \frac{3}{4}$ " Washer (#124), and M10 Aircraft Nut (#128) to the hole near the Rear Stabilizer. Secure the other hole with a M10 x 2 $\frac{1}{2}$ " Allen Bolt (#117) and $\text{\O} \frac{3}{4}$ " Washer (#124).

DIAGRAM 3

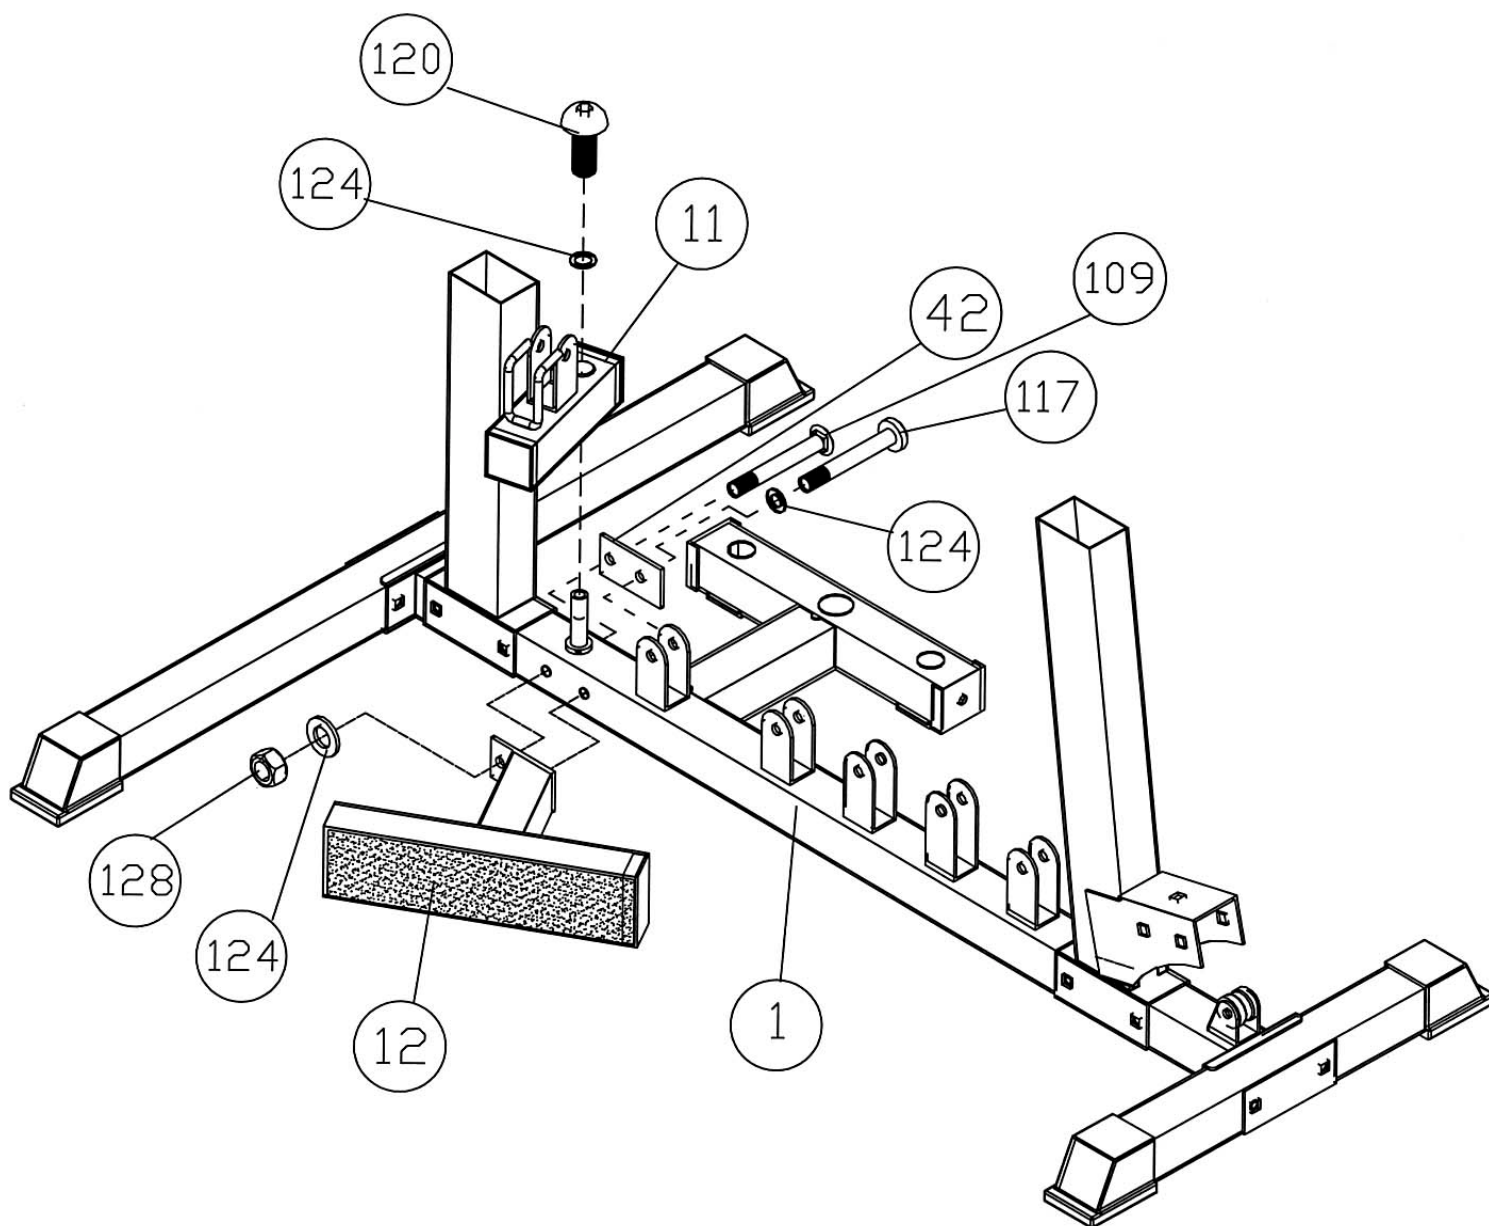


STEP 4 (See Diagram 4)

- A.) Attach the Butterfly Support Frame (#15) to the front of the Front Vertical Beam (#7). Attach the Butterfly Pulley Support (#16) to the back of the Front Vertical Beam (#7). Align the holes and secure them with two M10 x 3 3/4" Carriage Bolts (#107), Ø 3/4" Washers (#124), and M10 Aircraft Nuts (#128).
- B.) Attach a Pull Pin (#74) to the Left Butterfly Arm (#29). Repeat for the Right Butterfly Arm (#30).
- C.) Slide a Butterfly Pulley Cam (#17) onto the axle on the Left Butterfly Arm (#29). Make sure the Clip on the Cam is on the outside. Insert the axle into the hole on the Butterfly Support Frame (#15) from the bottom up. Secure it with a Ø 1 1/2" x Ø 3/4" Washer (#79) and Ø 1 3/8" Ring Cap (#78). Secure the Ring Cap with one M6 x 1 5/8" Hex Bolt (#111) and M6 Aircraft Nut (#129).
- D.) Repeat Step C above to install the Right Butterfly Arm (#30).
- E.) Slide a Ø 1 1/2" x Ø 5/8" Washer (#131) onto the bottom axle on the Left Butterfly Arm (#29). Attach a Butterfly Handle (#28) onto the axle. Secure it with one M10 x 3/4" Allen Bolt (#120) and Ø 3/4" Washer (#124). Repeat the same procedure to install the other side.

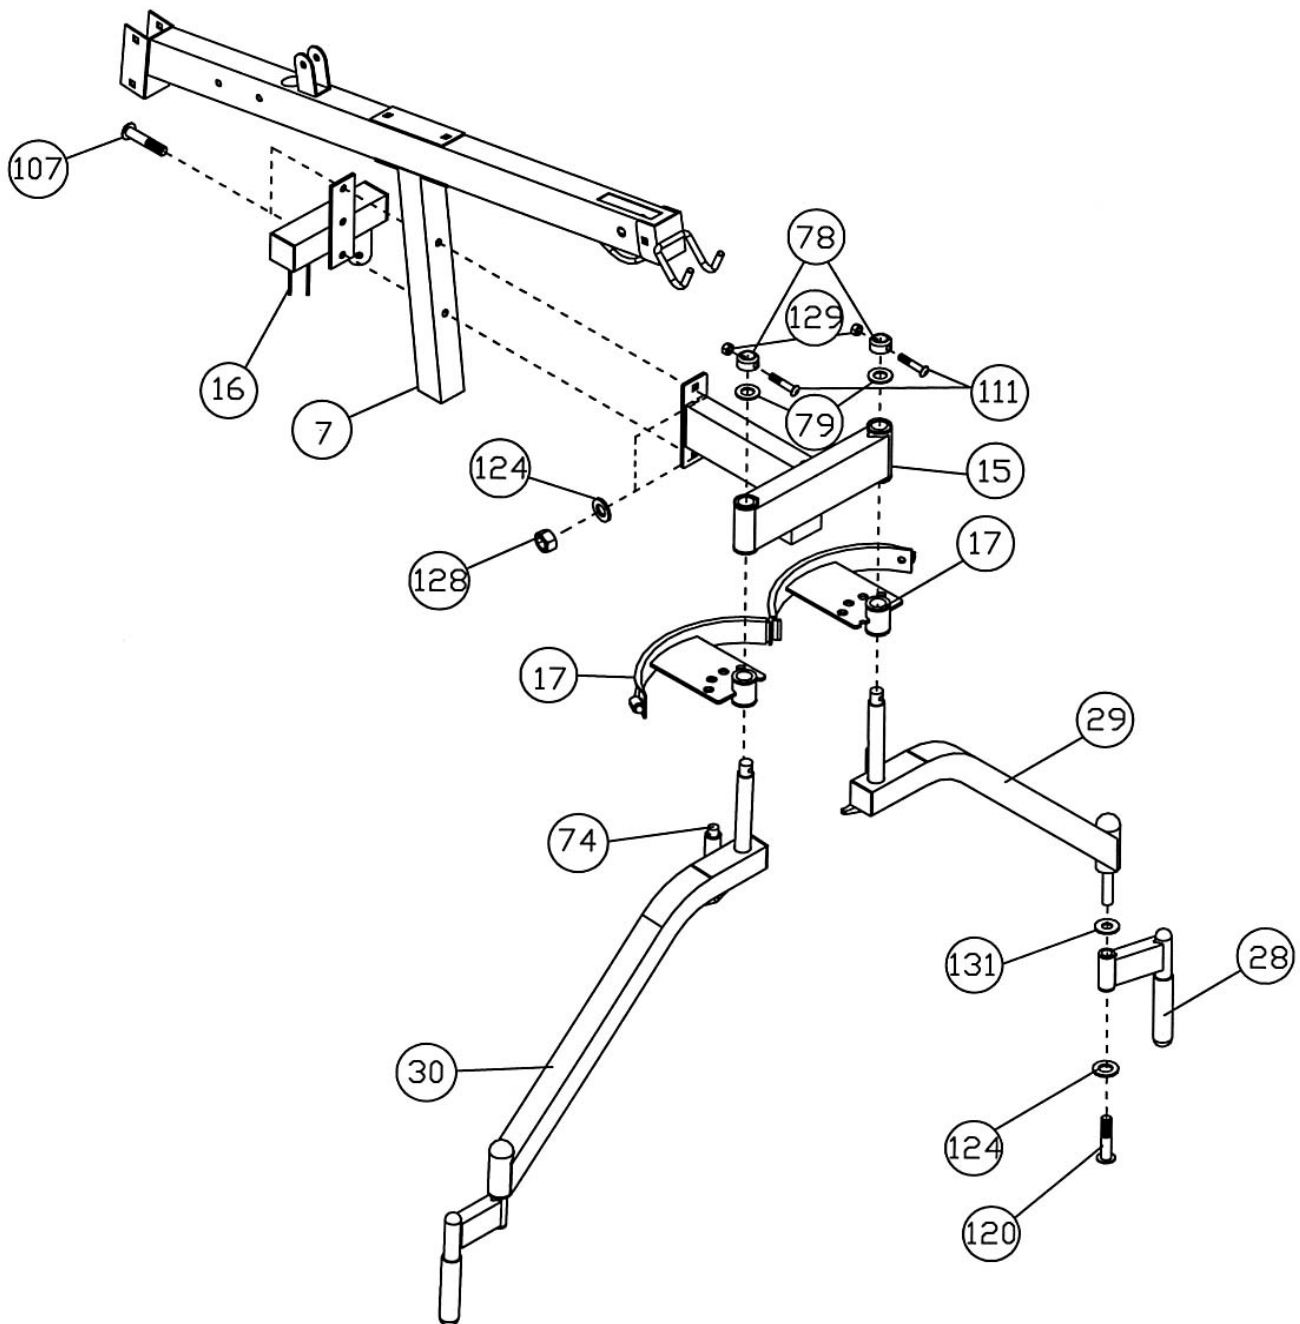

STEP 5 (See Diagram 5)


- A.) Install 19 Weight Plates (#58). To install the plates, hold the plate at an angle and place between the two Guide Rods (#10) then drop it down. Make sure the grooves on the plastic covers all face up. The plates should all interlock with each other. It is strongly recommended to spray lubricant such as WD-40 on the Guide Rods to minimize friction.
- B.) Insert the Selector Rod (#62) into the center hole on the Weight Plates. Slide the Selector Stem (#63) onto the Guide Rods from the top. Align the holes. Secure it to the Selector Rod with one M10 x 1 3/4" Allen Bolt (#119).
- C.) Insert the Weight Plate Selector Pin (#73) in between two plates to select the number of weight plates for exercise and to secure the Selector Rod. Make sure the magnet on the Pin faces up.
- D.) Attach the Top Socket Assembly (#9) to the Upper Frame and top of the Guide Rods. Secure it to the Upper Frame with two M10 x 2 3/4" Carriage Bolts (#109), one 4 3/4" x 2 3/4" Bracket (#45), two Ø 3/4" Washers (#124), and two M10 Aircraft Nuts (#128).
- E.) Secure the Top Socket Assembly (#9) to the Guide Rods (#10) with two M10 x 3/4" Allen Bolts (#120) and Ø 3/4" Washers (#124).

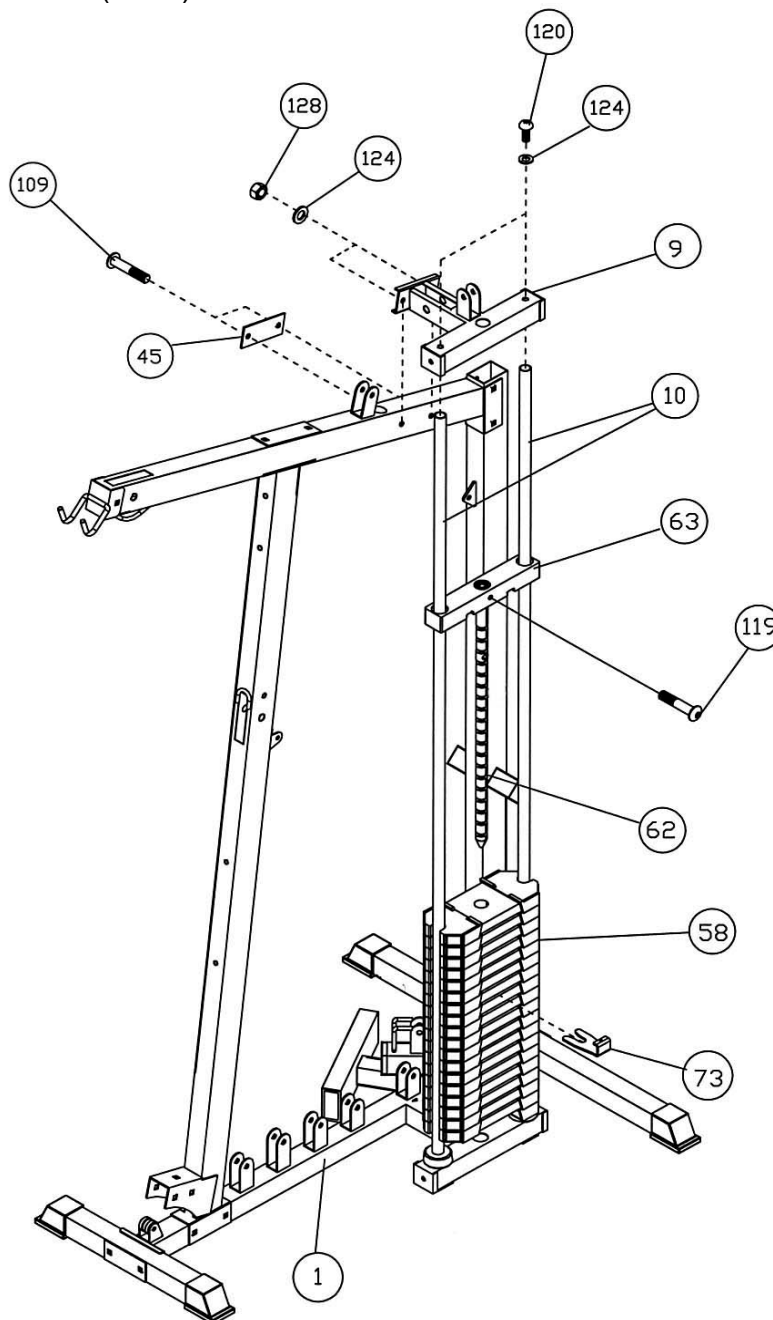

STEP6 (See Diagram 6)


- A.) Attach the Bench Press Base (#14) to the opening on the Rear Vertical Beam (#6). Carefully place two $\text{Ø}1\frac{1}{2}$ " x $\text{Ø}1$ " Washers (#132) in between the Base and the Rear Vertical Beam. Align the holes and insert a 9" Axle (#32). Secure both ends with two $\text{Ø}1\frac{1}{2}$ x $\text{Ø}\frac{1}{2}$ " Washers (#133) and M12 Aircraft Nuts (#127). Do not over tighten the Nuts. Make sure the Base is free to swivel on the Axle. Close both ends with two Cone-shaped End Caps (#105).
- B.) Attach four $\text{Ø}1$ " Bushings (#67) to the openings on the Bench Press Frame (#13). Attach the Bench Press Frame to the Bench Press Base (#14). Align the holes and insert a $13\frac{3}{4}$ " Axle (#33). Secure both ends with two $\text{Ø}1\frac{1}{2}$ " x $\text{Ø}\frac{1}{2}$ " Washers (#133) and M12 Aircraft Nuts (#127). Close both ends with two Cone-shaped End Caps (#105).
- C.) Lubricate the inside of the Foam Grips (#72) with water then slide them onto the Bench Press Frame (#13).
- D.) To adjust the Bench Press Arm, simply squeeze down the break handle on the right side of the Press Arm.

DIAGRAM 6

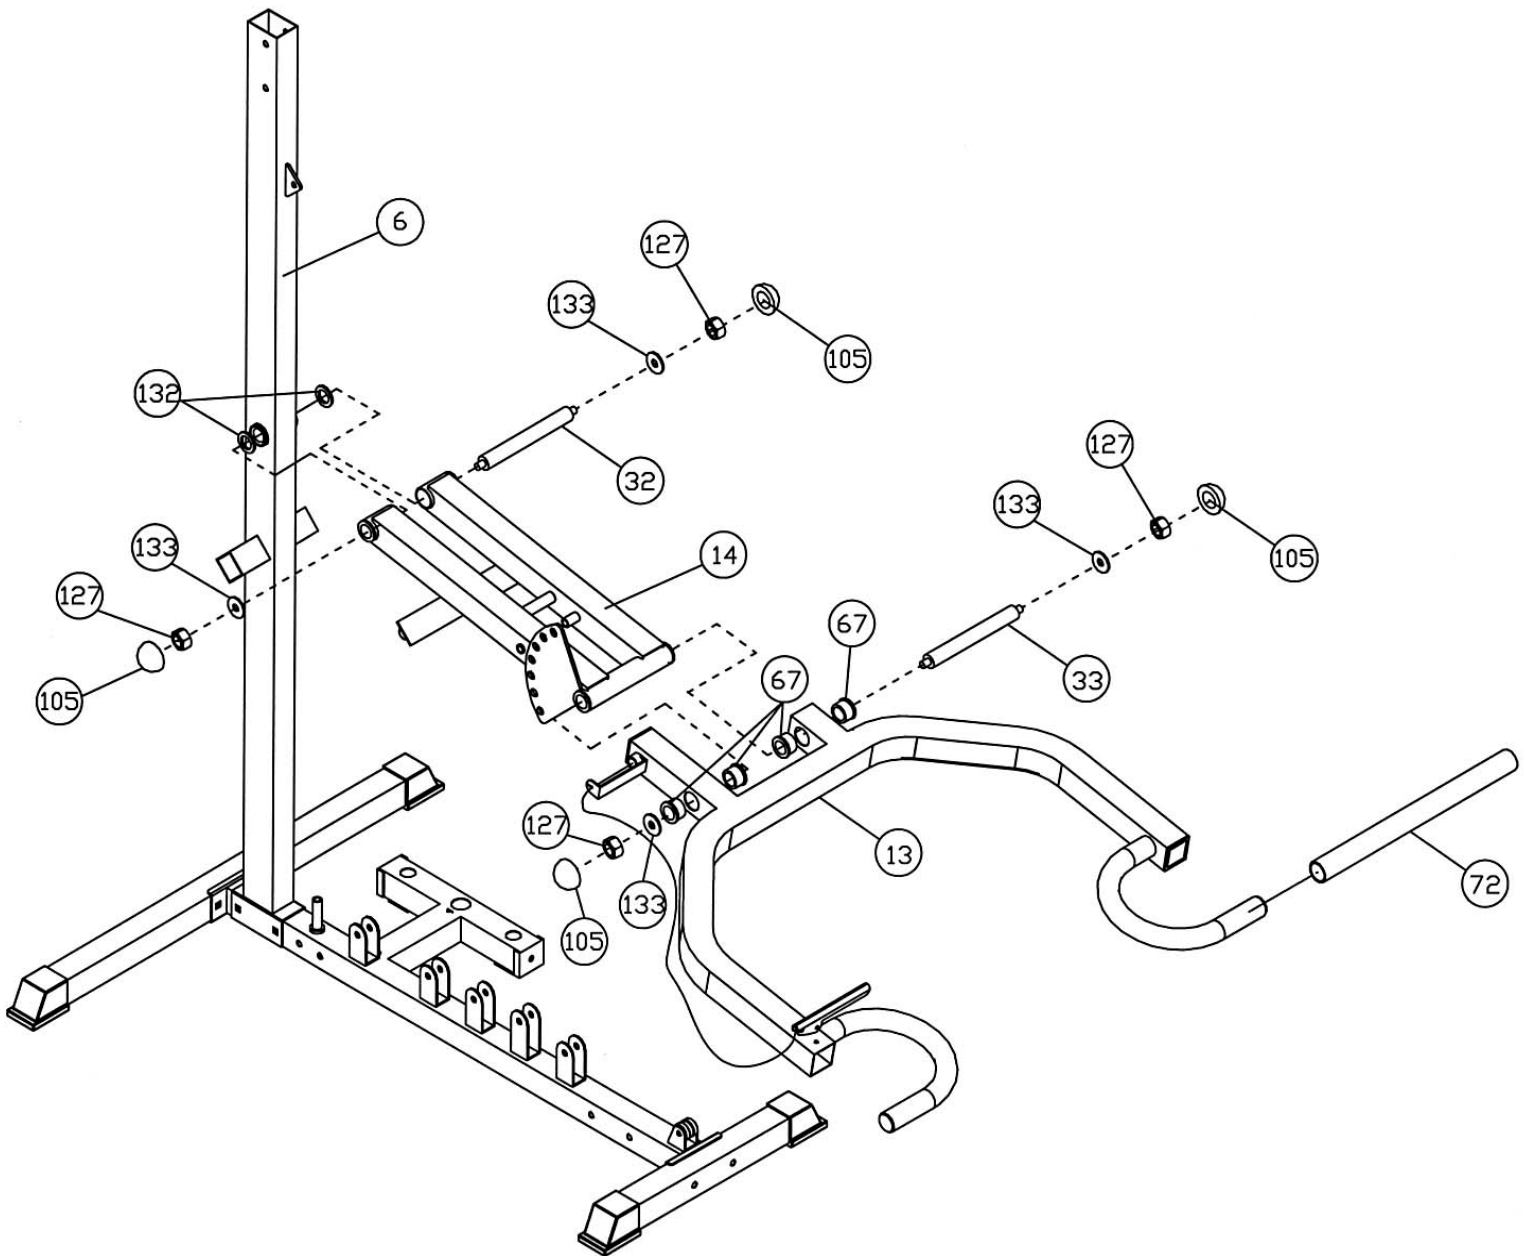


STEP 7 (See Diagram 7)

- A.) Slide the Sliding Block (#37) onto the Main Seat Support (#2). Thread a Lock Knob (#87) into the hole on the Sliding Block to hold it in position.
- B.) Attach the rear end of Main Seat Support (#2) to the open bracket on the Front Vertical Beam (#7). Secure it with three M10 x 2 3/4" Carriage Bolts (#109), Ø 3/4" Washers (#124), and M10 Aircraft Nuts (#128).
- C.) Place the Main Seat Support (#2) onto the Front Support Frame (#3). Secure it with two M10 x 2 3/4" Carriage Bolts (#109), Ø 3/4" Washers (#124), and M10 Aircraft Nuts (#128).
- D.) Attach the front bottom of Main Seat Support to the Front Support Frame. Secure it with one M10 x 2 3/4" Carriage Bolt (#109), Ø 3/4" Washer (#124), and M10 Aircraft Nut (#128).
- E.) Attach the Seat Bracket (#18) to the pivot on the Main Seat Support (#2). Push two Ø 3/8" Bushings (#69) through the holes on Seat Bracket into the pivot.
- F.) Attach the Backrest Support (#25) to each end of the Backrest Incline Support (#22). Attach the front holes on the Backrest Supports (#25) to the pivot. Align the holes and secure them with one M10x7 1/4" Hex Bolt (#110), two Ø 3/4" Washers (#124) and one M10 Aircraft Nut (#128).
- G.) Attach the bottom of the Backrest Incline Support (#22) to the bracket on the Sliding Block (#37). Secure it with one M10 x 3" Allen Bolt (#116), two Ø 3/4" Washes (#124), and one M10 Aircraft Nut (#128).
- H.) Attach the Leg Developer (#26) to the open bracket on the Main Seat Support (#2). Secure it with a 2 1/2" Axle (#139), two Ø 3/4" Washers (#124), and two M10 x 3/4" Allen Bolts (#120).
- I.) Attach the Curl Bar Handle (#21) to the Leg Developer. Secure it with a 3" L-shaped Pin (#138).

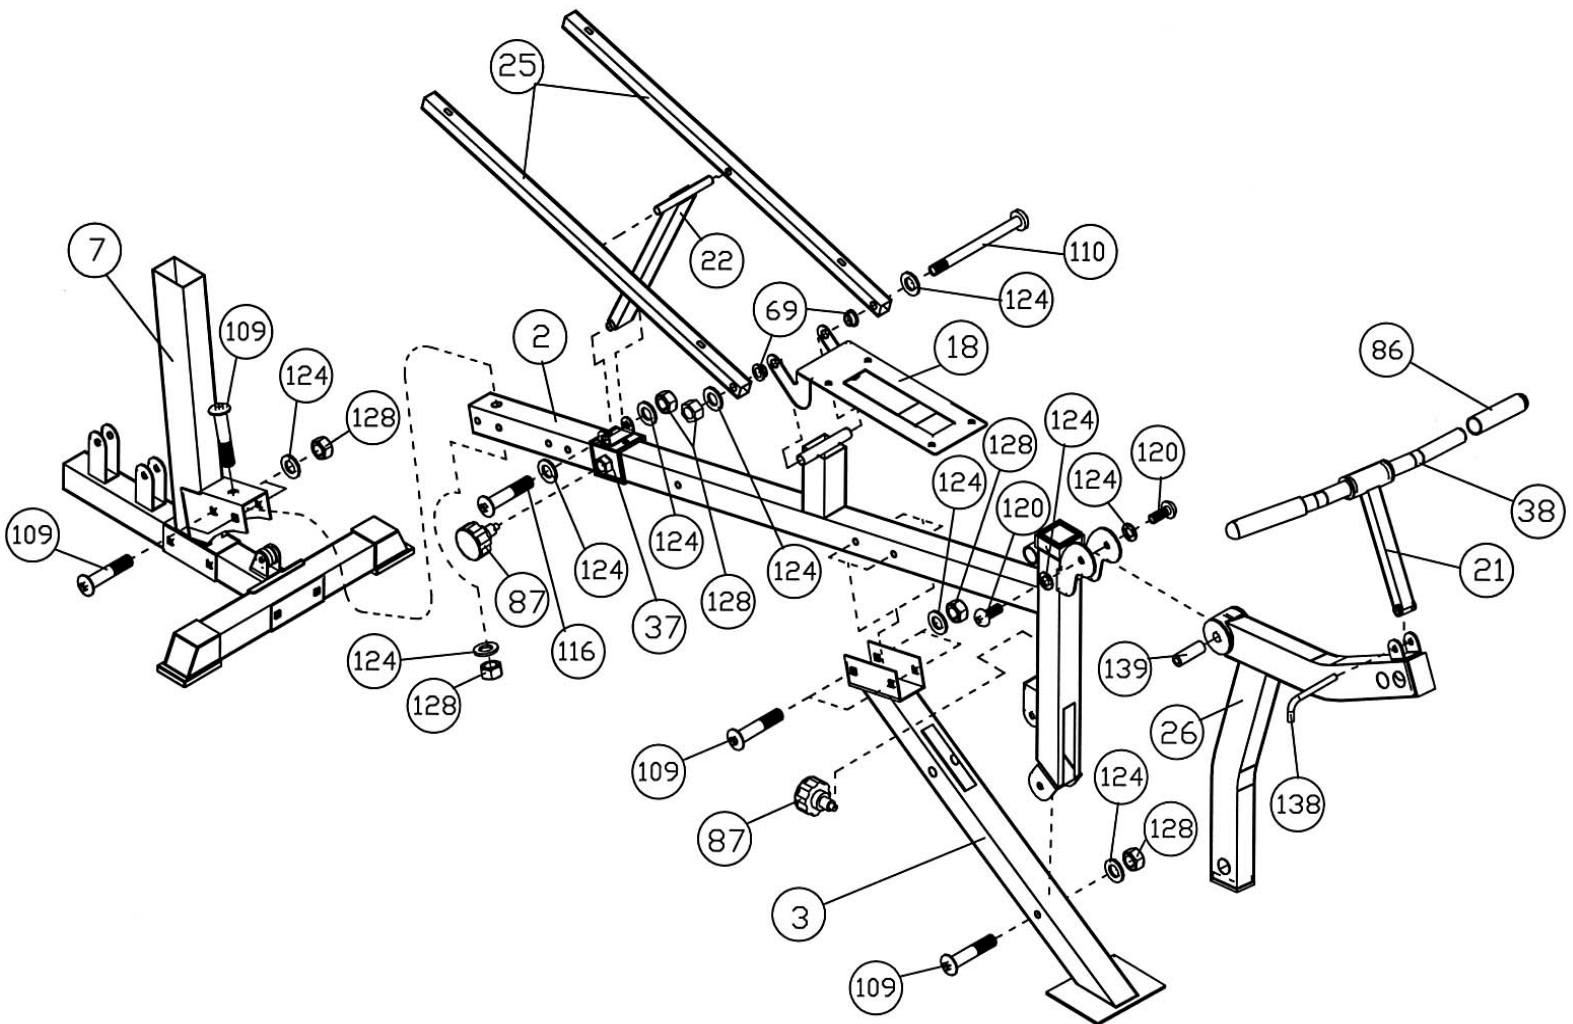

STEP 8 (See Diagram 8)


- A.) Attach Backrest Board (#48) to the Front Vertical Beam (#7). Secure it with two M8 x 3 3/8" Allen Bolts (#115) and Ø 5/8" Washers (#125).
- B.) Attach the Adjustable Backrest Board (#49) to the Backrest Supports (#25). Secure it with four M6 x 1 3/8" Hex Bolts (#112) and Ø 1/2" Washers (#126).
- C.) Place the Seat (#50) onto the Seat Bracket (#18). Secure it to the two rear holes on the Seat Bracket with two M8 x 3/4" Allen Bolts (#122) and Ø 5/8" Washes (#125). Attach a Seat Incline Adjustment (#19) to the two front holes and secure them with two M8 x 3/4" Allen Bolts (#122) and Ø 5/8" Washers (#125). Insert a 4" L-shaped Pin (#137) through the selected hole on the Seat Incline Adjustment to hold the desired height.
- D.) Insert one Foam Tube (#27) halfway through the hole on the Main Seat Support (#2). Insert two Foam Tubes halfway through the holes on the Leg Developer (#26). Push six Foam Rolls (#71) onto the Tubes from both ends. Plug six Foam Roll End Caps (#102) into the ends.
- E.) Attach the Arm Curl Pad (#51) to the Arm Curl Stand (#20). Secure it with two M8 x 5/8" Allen Bolts (#121) and Ø 5/8" Washers (#125). Insert the Arm Curl Stand into the opening on the Main Seat Support. Use the Lock Knob to lock the desired Arm Curl exercise height. Remove the Arm Curl Stand and Curl Bar Handle when doing Leg Developer exercises.

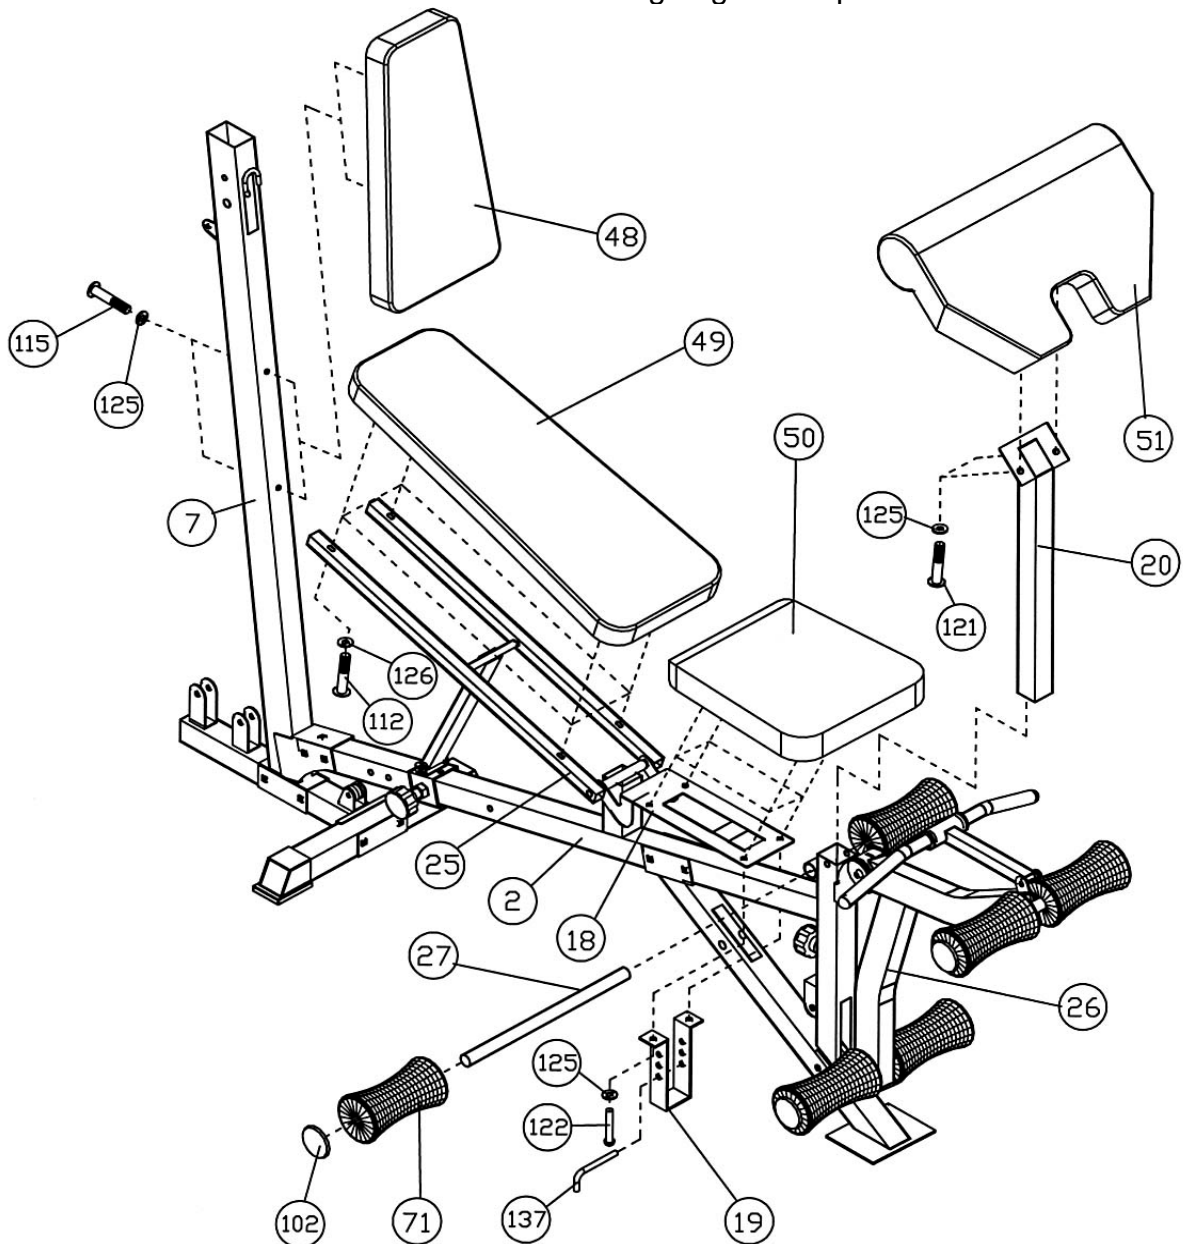


STEP 9 (See Diagram 9)

A.) Attach the two Weight Stack Covers (#39) to the Top Socket Assembly (#9) and Main Base Frame (#1). Secure each Cover with two M10 x $\frac{3}{4}$ " Allen Bolts (#120) and $\varnothing \frac{3}{4}$ " Washers (#124).

DIAGRAM 9

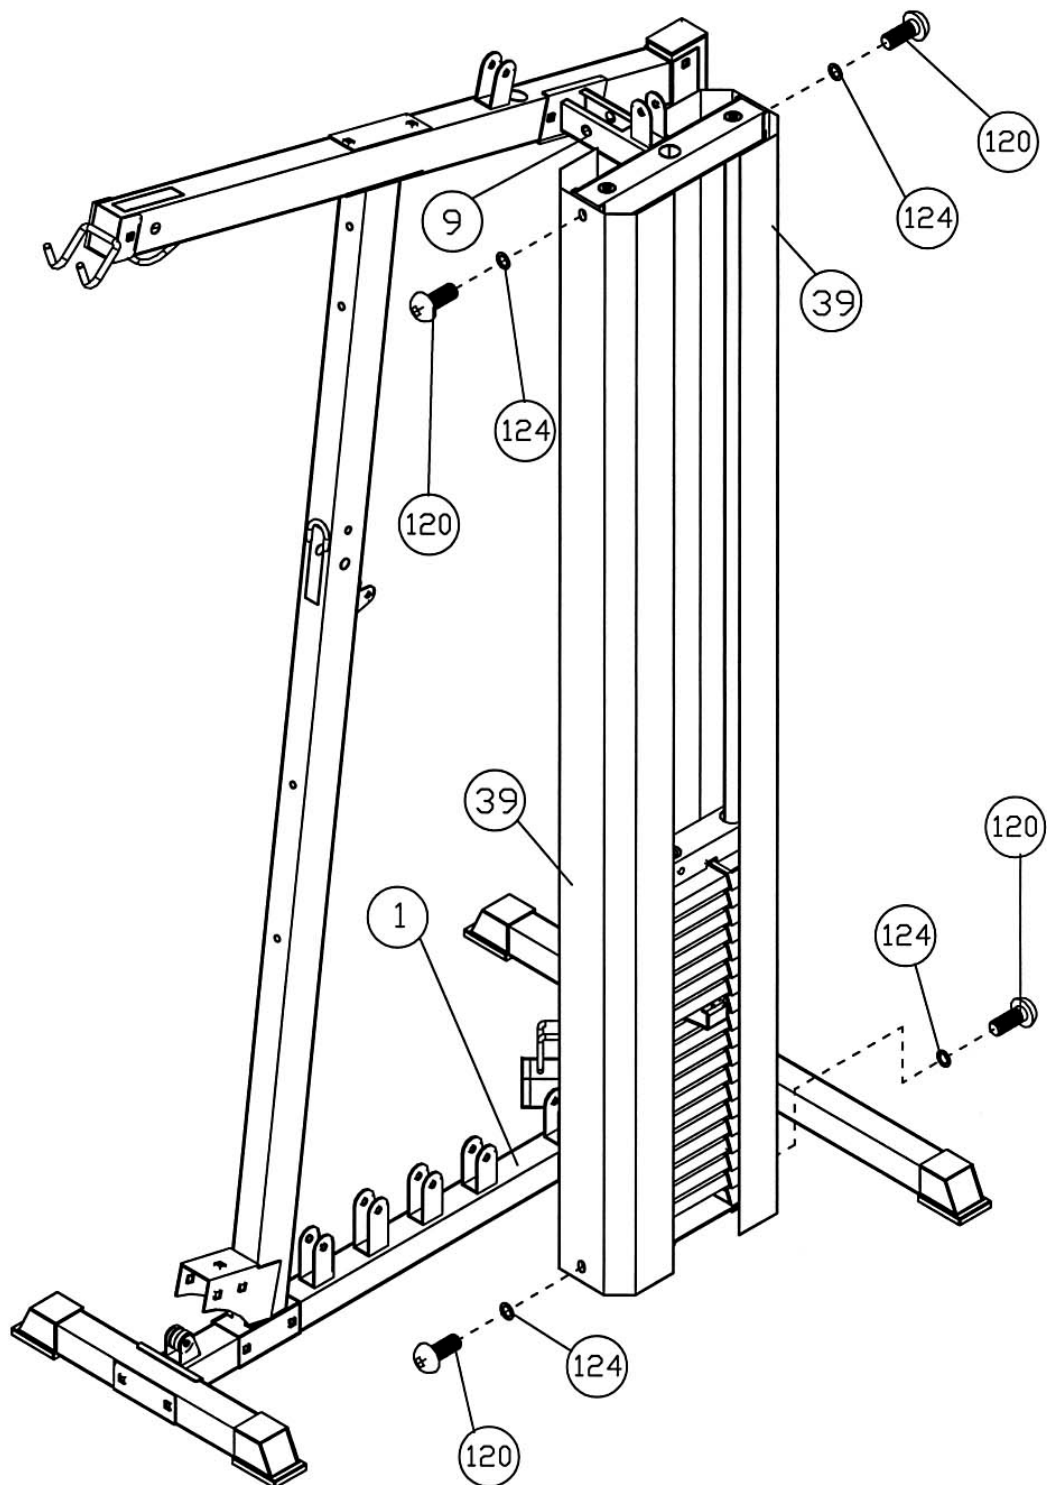


CABLE LOOP DIAGRAM

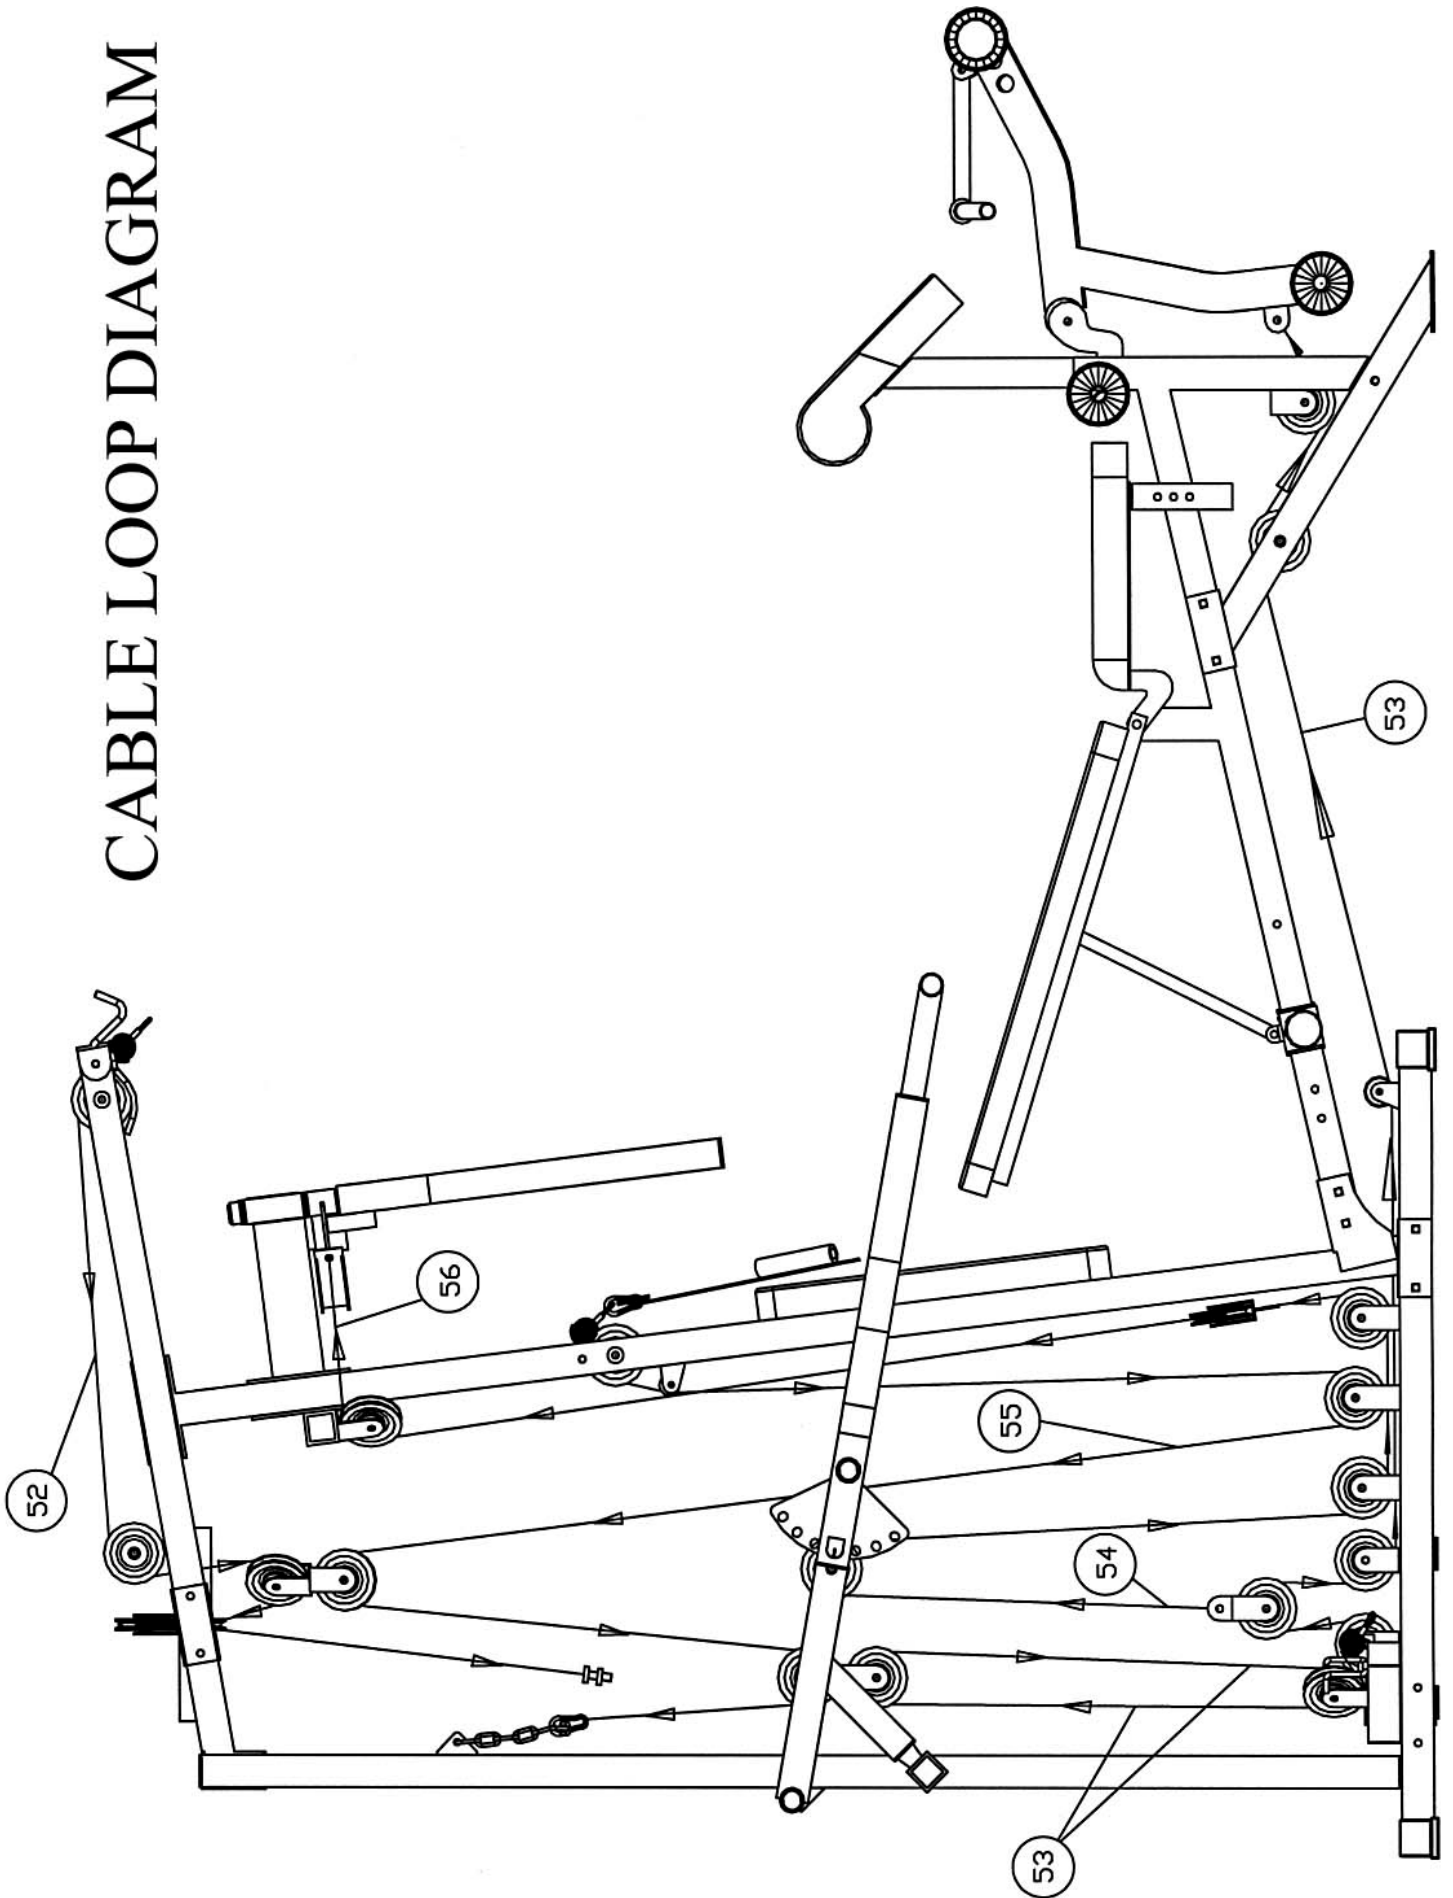

STEP 10 (See Cable Loop Diagram & Diagram 10)

- A.) Attach one end of the 143" Butterfly Cable (#56) to the Clip on the Butterfly Pulley Bracket (#17) on the right side. Draw the Cable to the Butterfly Pulley Support (#16).
- B.) Attach a Pulley (#66) to the open bracket. Secure it with one M10 x 1 3/4" Allen Bolt (#113), two Ø 3/4" Washers (#124), and one M10 Aircraft Nut (#128).
- C.) Draw the Cable over the Pulley then pull downward. Repeat Step B above to install a Pulley to the Single Floating Pulley Bracket (#35). Let the Pulley hanging for now.
- D.) Draw the Cable around the Pulley then pull upward to the open bracket on the left side of the Butterfly Pulley Support (#16). Repeat Step B to install another Pulley.
- E.) Draw the Cable over the Pulley then to the left Butterfly Pulley Bracket. Secure the end of the Cable to the Clip.


DIAGRAM 10

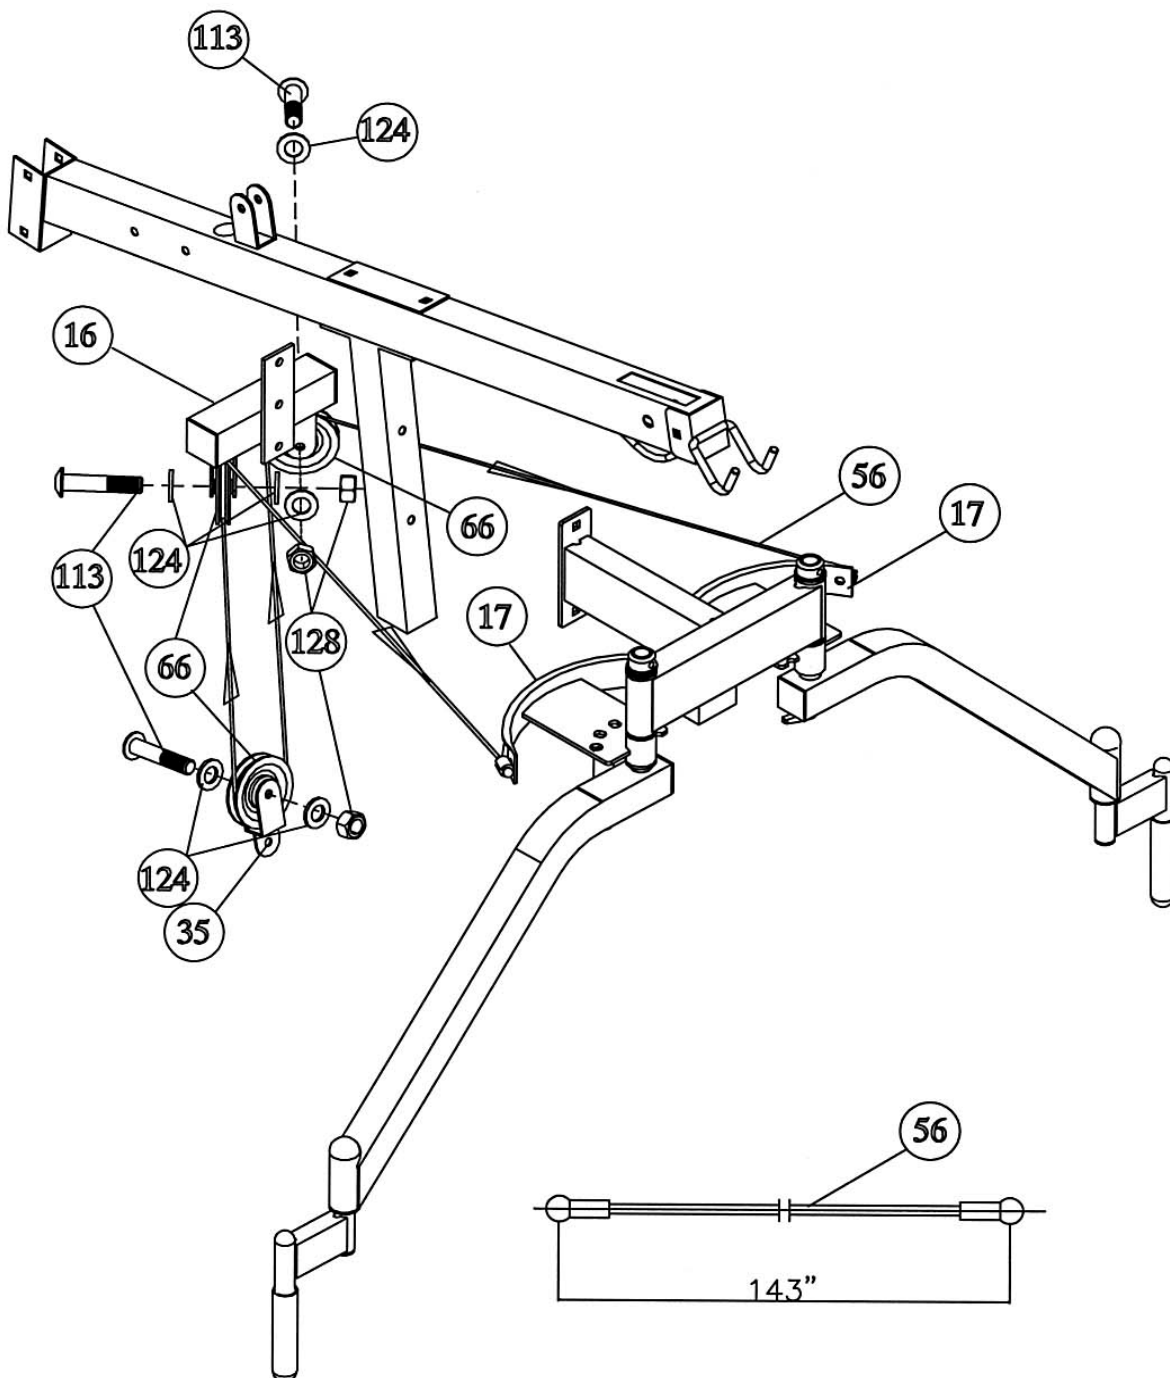

STEP 11 (See Cable Loop Diagram & Diagram 11)

- A.) Attach the 118" Upper Cable (#52) to the front opening on the Upper Frame (#8). Attach a Pulley to the opening. Secure the Pulley with one M10 x 2 ½" Allen Bolt (#117), two Ø 7/8" Pulley Bushings (#70), and one M10 Aircraft Nut (#128). Make sure the Ball Stopper of the Cable is underneath the Frame.
- B.) Draw the Cable over the Pulley and toward the back of the machine. Attach a Pulley to the open bracket on the top of the Upper Frame. Secure the Pulley with one M10 x 1 ¾" Allen Bolt (#113), one L-shaped Pulley Bracket (#46), two Ø ¾" Washers (#124), and one M10 Aircraft Nut (#128).
- C.) Draw the Cable over the Pulley and pull downward. Attach a Pulley to an Angled Double Floating Pulley Bracket (#34). Secure it with one M10 x 1 ¾" Allen Bolt (#113), two Ø ¾" Washers (#124), and one M10 Aircraft Nut (#128). Draw the Cable around the Pulley then pull upward to the opening on the Top Socket Assembly (#9). Let the Bracket hanging for now.
- D.) Repeat the Step A above to install a Pulley to the opening.
- E.) Draw the Cable over the Pulley then to the open bracket on the top of the Top Socket Assembly (#9). Repeat Step B above to install a Pulley.
- F.) Draw the Cable around the Pulley then pull downward to the Selector Rod (#62). Screw the Bolt on the end of Cable into the Selector Rod. Make sure to tighten down the nut on the bolt against the Selector Rod.
- G.) Connect a Short Chain (#134) to the end of the Cable with a C-clip (#136). Connect the Lat Bar (#23) to the Short Chain with another C-clip. Adjust the length of Chain to adjust the Lat Bar exercise height.


DIAGRAM 11

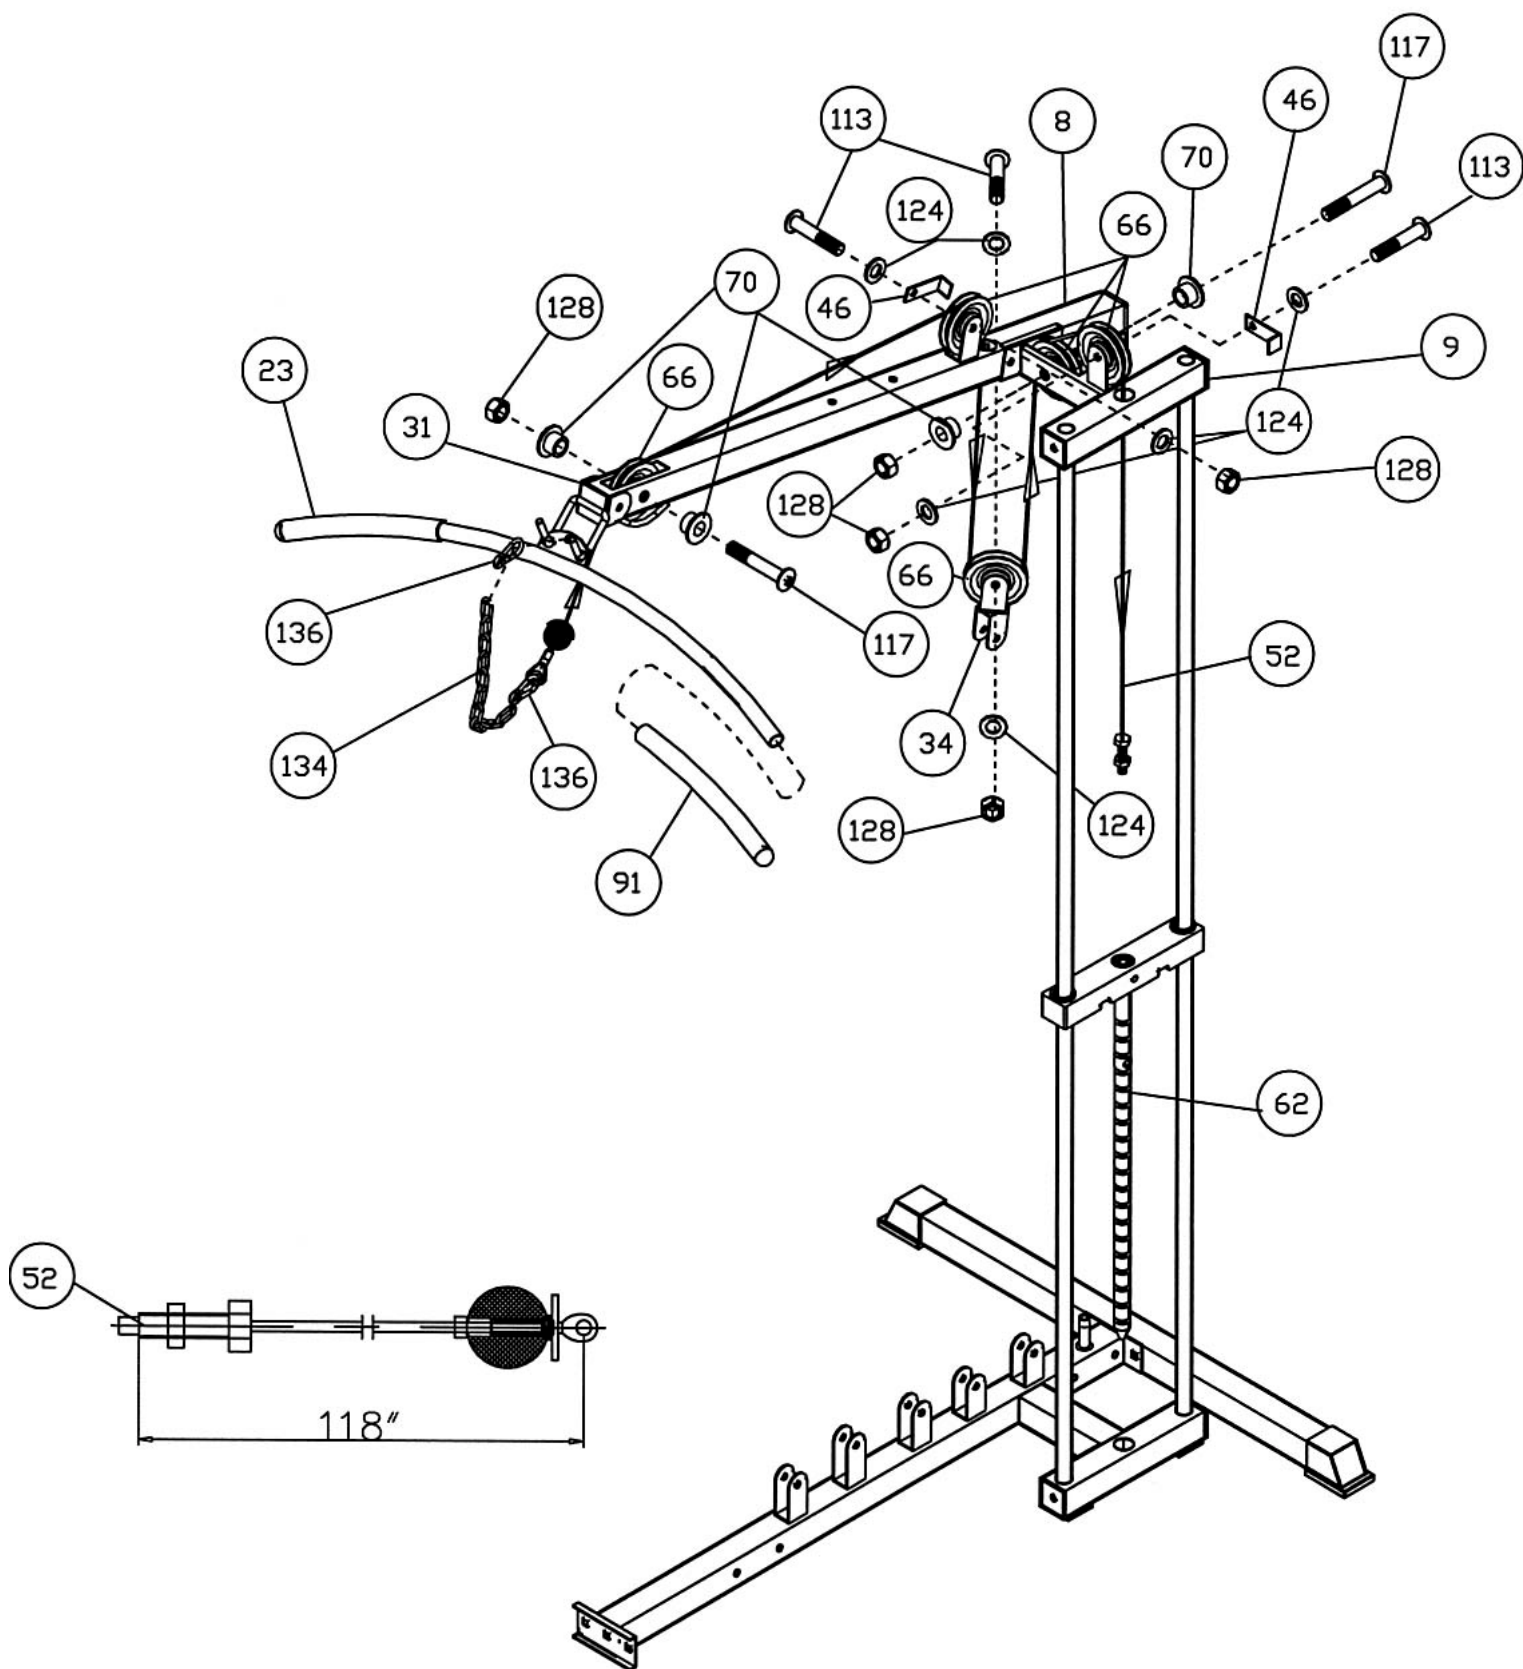

STEP 12 (See Cable Loop Diagram & Diagram 12)


- A.) Attach the Ball-end of the 163" AB Cable (#55) to the opening on the Front Vertical Beam (#7). Attach a Pulley to the opening. Secure it with one M10 x 2 ½" Allen Bolt (#117), two Ø 7/8" Pulley Bushings (#70), and one M10 Aircraft Nut (#128). Use a C-clip (#136) to connect the AB Strap (#59) to the end of the Cable.
- B.) Draw the Cable over the Pulley then pull downward and over the Small Pulley Wheel (#65) to the second open bracket on the Main Base Frame (#1). Attach a Pulley and U-shaped Pulley Bracket (#47) to the bracket.
- C.) Secure the Pulley with one M10 x 1 ¾" Allen Bolt (#113), two Ø ¾" Washes (#124), and one M10 Aircraft Nut (#128).
- D.) Draw the Cable around the Pulley then Pull upward to the Angled Double Floating Pulley Bracket (#34) previously installed in Step11-C. Repeat Step C above to install another Pulley.
- E.) Draw the Cable over the Pulley then pull downward. Attach the Cable to a Pulley. Repeat Step C above to install the Pulley to a Double Floating Pulley Bracket (#36). Let the Bracket hanging for now.
- F.) Draw the Cable around the Pulley then pull the Cable upward. Use a C-clip (#136) to connect the end of Cable to a Short Chain (#134). Secure the Short Chain to the Rear Vertical Beam (#6) with one M10 x 1" Allen Bolt (#114), two Ø ¾" Washers (#124), and one M10 Aircraft Nut (#128).
- G.) After completing the entire cable installation, check the tightness of the Cable loop system. Adjust the tension of Cables by adjusting the length of the Short Chain. If the Cables are too loose, shorten the Chain.

DIAGRAM 12

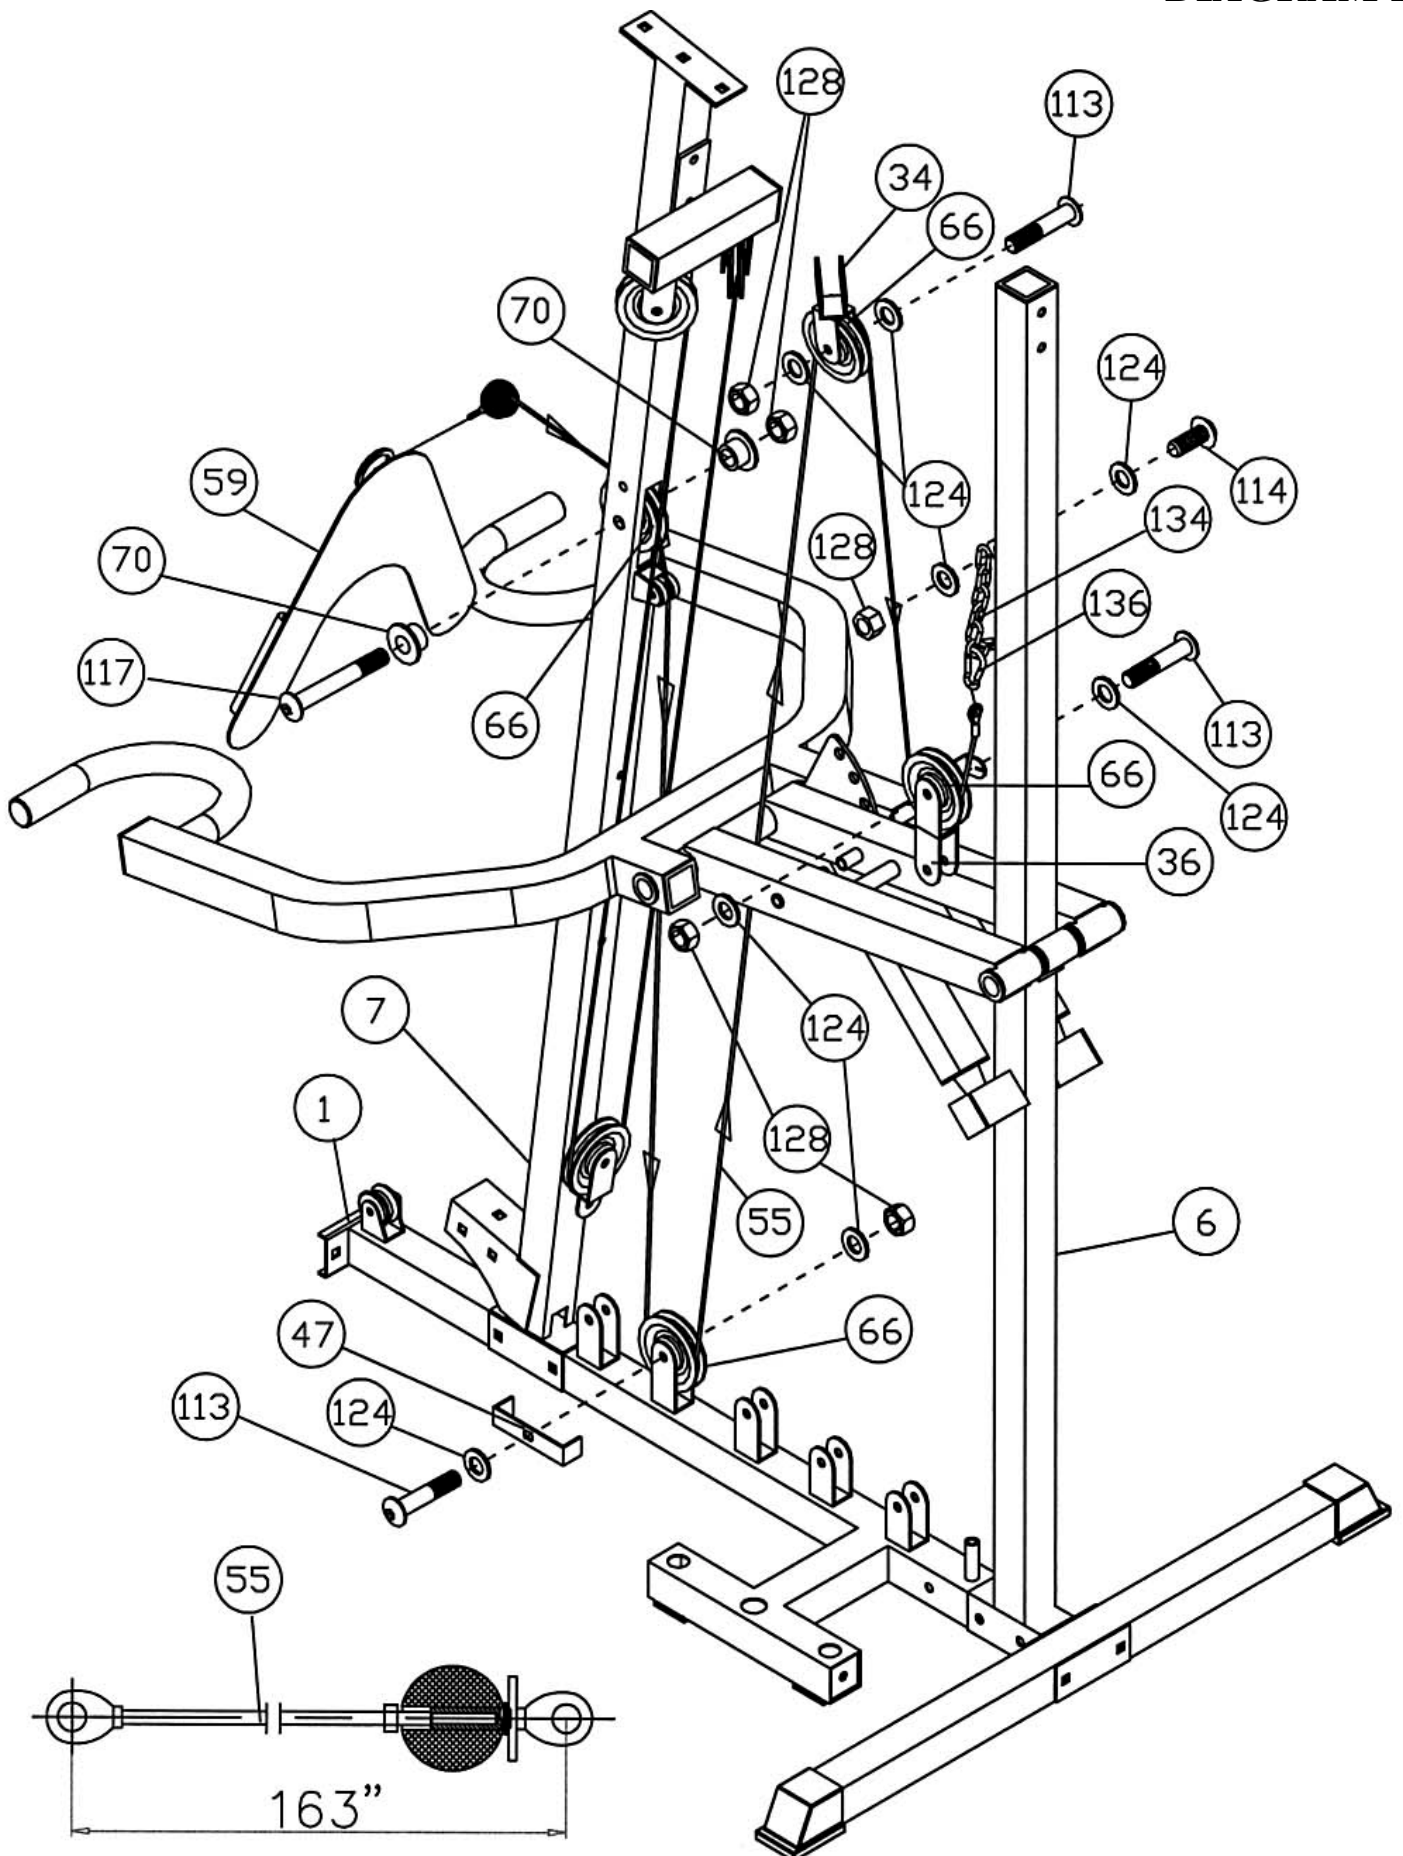

STEP 13 (See Cable Loop Diagram & Diagram 13)


- A.) Attach one end of the 78" Bench Press Cable (#54) to a Single Floating Pulley Bracket (#35). Secure it with one M10 x 1" Allen Bolt (#114), two $\text{\O} \frac{3}{4}$ " Washers (#124), and one M10 Aircraft Nut (#128). Let the Bracket hanging for now.
- B.) Pull the Cable upward to the opening between the Bench Press Base (#14). Attach a Pulley to the opening. Secure it with one 7" Axle (#130) and two M8 Hex Socket Screws (#82).
- C.) Draw the Cable around the Pulley then pull downward to the third open bracket on the Main Base Frame (#1). Attach a Pulley and a L-shaped Pulley Bracket (#46) to the bracket.
- D.) Secure the Pulley with one M10 x 1 $\frac{3}{4}$ " Allen Bolt (#113), two $\text{\O} \frac{3}{4}$ " Washers (#124), and one M10 Aircraft Nut (#128).
- E.) Draw the Cable underneath the Pulley and through the opening underneath the second Pulley previously installed. Draw the Cable to the first open bracket on the Main Base Frame (#1). Repeat Step D above to install another Pulley.
- F.) Draw the Cable around the Pulley then pull upward to the Single Floating Pulley Bracket (#35) previously installed in Step 10-C. Secure the Cable with one M10 x 1" Allen Bolt (#114), two $\text{\O} \frac{3}{4}$ " Washers (#124), and one M10 Aircraft Nut (#128).

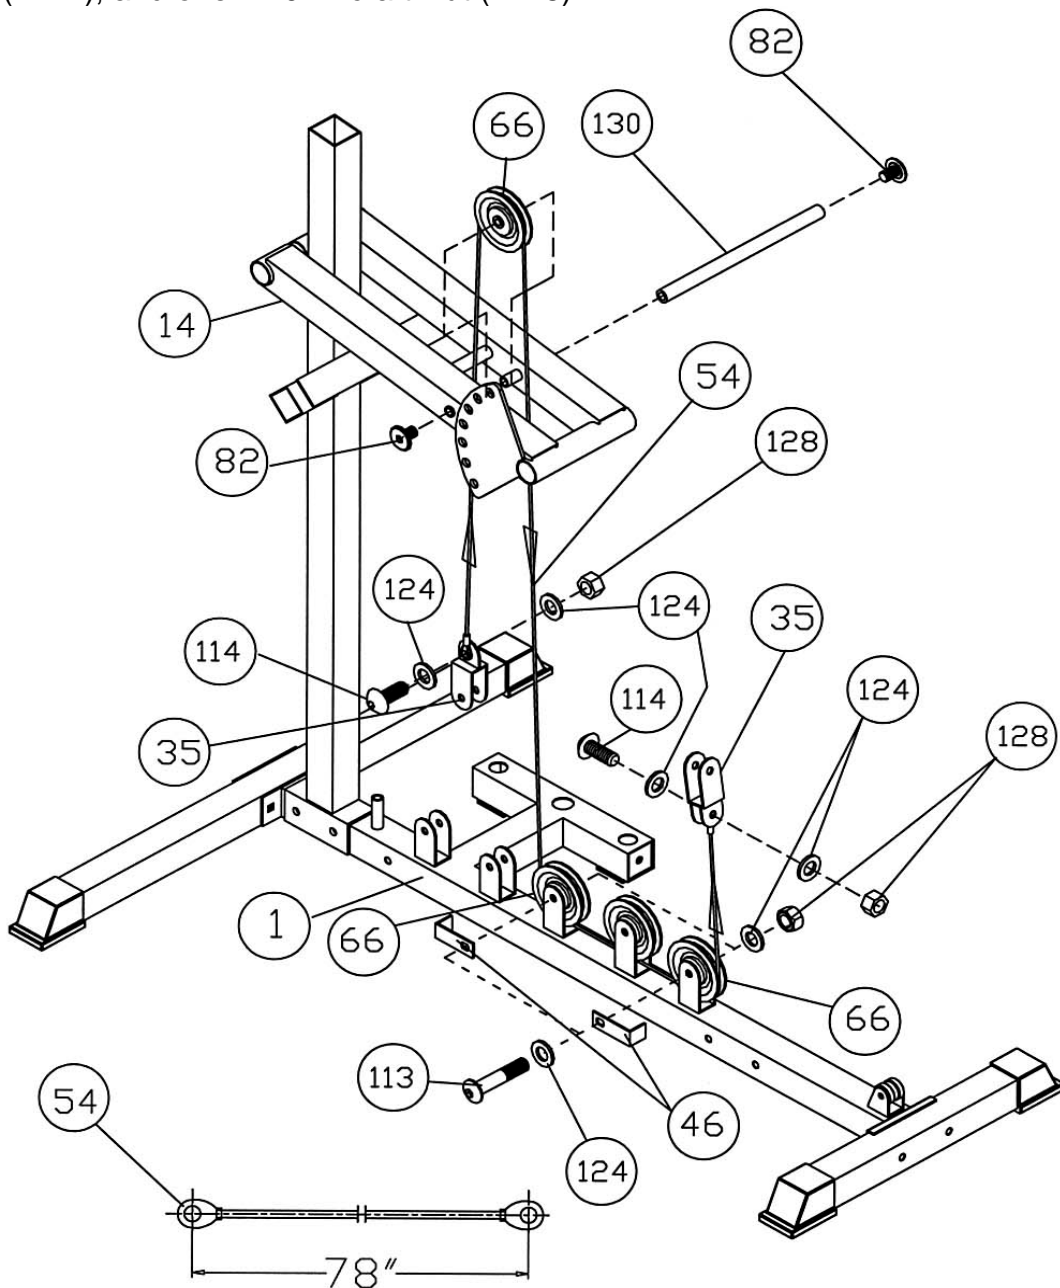

STEP 14 (See Cable Loop Diagram & Diagram 14)

- A.) Attach the 163" Lower Cable (#53) to the Swivel Frame (#11).
- B.) Install a Pulley to the bracket on the Swivel Frame with one M10 x 1 ¼" Allen Bolt (#113), two Ø ¾" Washers (#124), one L-shaped Bracket (#46) and one M10 Aircraft Nut (#128).
- C.) Draw the Cable around the Pulley then pull upward to the Double Floating Pulley Bracket (#36) previously installed in Step 12-E. Install another Pulley.
- D.) Draw the Cable around the Pulley then pull downward to the first open bracket on the left. Repeat the Step B above to install a Pulley with a U-shaped Pulley Bracket (#47).
- E.) Draw the Cable around the Pulley then pull upward to the Single Floating Pulley Bracket (#35) previously installed in Step 13-A. Repeat Step B above to install a Pulley.
- F.) Draw the Cable around the Pulley then pull downward to the open bracket on the Main Base Frame. Repeat Step B above to install a Pulley with a L-shaped Pulley Bracket (#46).
- G.) Draw the Cable underneath the three Pulleys previously installed in Step 13 and through the opening on the bottom of the Front Vertical Beam (#7). Continuously draw the Cable underneath the Small Pulley Wheel (#65) on the Main Base Frame to the opening on the Front Support Frame (#3). Attach a Pulley to the opening. Secure it with one M10 x 2 ½" Allen Bolt (#117), two Ø 7/8" Pulley Bushings (#70), and one M10 Aircraft Nut (#128).
- H.) Draw the Cable over the Pulley and to the open bracket on the Main Seat Support (#2). Repeat Step B above to install a Pulley.
- I.) Draw the Cable through the opening on the Main Seat Support to the open bracket on the Leg Developer (#26). Secure the end of Cable with one M10 x 1" Allen Bolt (#114), two Ø ¾" Washers (#124), and one M10 Aircraft Nut (#128).
- J.) Use a C-clip (#136) to connect a Long Chain (#135) to the end of the Cable. Use another C-clip to connect the Shiver Bar (#24), Single Handle (#61), or Ankle Strap (#60) for various exercises.

DIAGRAM 14

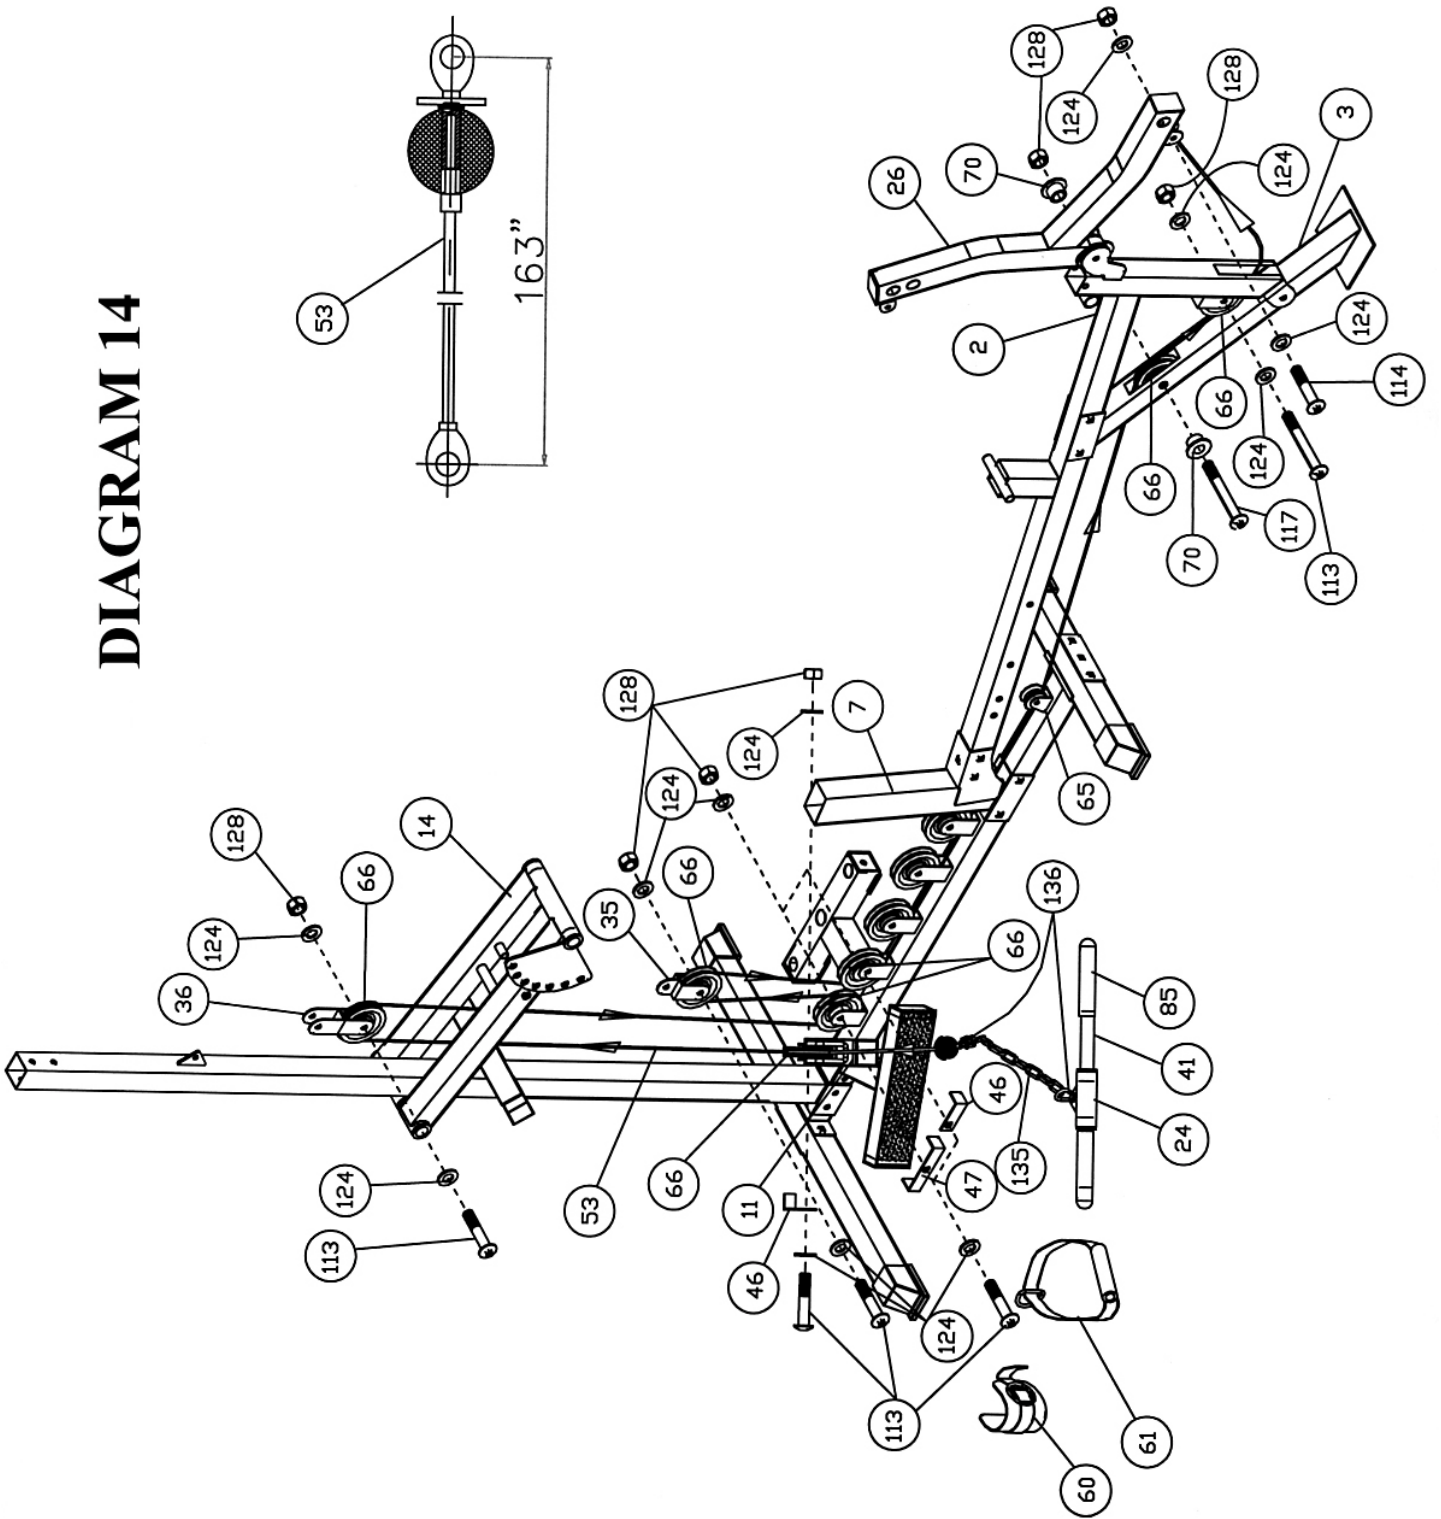

PARTS LIST

KEY NO.	DESCRIPTION	Q'ty			
1	Main Base Frame	1	56	143" Butterfly Cable	1
2	Main Seat Support	1	57	Wire	1
3	Front Support Frame	1	58	Weight Plate	19
4	Rear Stabilizer	1	59	AB Strap	1
5	Front Stabilizer	1	60	Ankle Strap	1
6	Rear Vertical Beam	1	61	Single Handle	1
7	Front Vertical Beam	1	62	Selector Rod	1
8	Upper Frame	1	63	Selector Stem	1
9	Top Socket Assembly	1	64	Foot Support Panel	1
10	Guide Rod	2	65	Small Pulley Wheel	2
11	Swivel Frame	1	66	Pulley	22
12	Foot Support	1	67	Ø 1" Bushing	18
13	Bench Press Frame	1	68	Ø 5/8" Bushing	6
14	Bench Press Base	1	69	Ø 3/8" Bushing	2
15	Butterfly Support Frame	1	70	Ø 7/8" Pulley Bushing	8
16	Butterfly Pulley Support	1	71	Foam Roll	6
17	Butterfly Pulley Cam	2	72	Foam Grip	2
18	Seat Bracket	1	73	Weight Plate Selector Pin	1
19	Seat Incline Adjustment	1	74	Pull Pin Set	2
20	Arm Curl Stand	1	75	Pull Pin Nut	1
21	Curl Bar Handle	1	76	Pull Pin Adjustment	1
22	Backrest Incline Support	1	77	Spring	1
23	Lat Bar	1	78	Ø 1 3/8" Ring Cap	2
24	Shiver Bar	1	79	Ø 1 1/2" x Ø 3/4" Washer	2
25	Backrest Support	2	80	1 1/4" Philips Screw	2
26	Leg Developer	1	81	5/8" Philips Screw	2
27	Foam Tube	3	82	M8 Hex Socket Screw	2
28	Butterfly Handle	2	83	M5 x 3/8" Philips Screw	4
29	Left Butterfly Arm	1	84	Wire Control Handle Grip	1
30	Right Butterfly Arm	1	85	6" Handle Grip	4
31	Lat Bar Holder	1	86	Curl Bar Grip	2
32	9" Axle	1	87	Lock Knob	2
33	13 3/4" Axle	1	88	Ø 2 1/2" Rubber Bumper	2
34	Angled Double Floating Pulley Bracket	1	89	Ø 1 3/4" Rubber Bumper	1
35	Single Floating Pulley Bracket	2	90	Ø 1 5/8" Rubber Bumper	2
36	Double Floating Pulley Bracket	1	91	Lat Bar Grip	2
37	Sliding Block	1	92	Ø 2 3/8" Washer	2
38	Curl Bar Handle Tube	1	93	2 3/8" x 2" Sleeve	2
39	Weight Stack Cover	2	94	2" x 1 3/4" Sleeve	1
40	Wire Control Handle	1	95	2" Square End Cap	1
41	Shiver Bar Handle	1	96	2" Stabilizer End Cap	4
42	4" x 2" Bracket	1	97	2 3/8" x 1 5/8" End Cap (Impex)	2
43	6 1/4" x 2" Bracket	1	98	2 3/4" x 2" End Cap	1
44	4 3/4" x 2" Bracket	2	99	2" Square End Cap (Impex)	8
45	4 3/4" x 2 3/4" Bracket	1	100	1 1/2" Square End Cap (Impex)	2
46	L-shaped Bracket	6	101	1" Square End Cap	2
47	U-shaped Bracket	2	102	Foam Roll End Cap	6
48	Backrest Board	1	103	3 1/8" x 1 5/8" End Cap	2
49	Adjustable Backrest Board	1	104	Ø 1" x 1" Bushing	4
50	Seat	1	105	Cone-shaped End Cap	4
51	Arm Curl Pad	1	106	Ø 5/8" x 1/4" Bushing	2
52	118" Upper Cable	1	107	M10 x 3 3/4" Carriage Bolt	2
53	163" Lower Cable	1	108	M10 x 3 1/2" Carriage Bolt	2
54	78" Bench Press Cable	1	109	M10 x 2 3/4" Carriage Bolt	20
55	163" AB Cable	1			

110	M10 x 7 1/4" Hex Bolt	1	128	M40 Aircraft Nut	51
111	M6 x 1 5/8" Hex Bolt	2	129	M6 Aircraft Nut	2
112	M6 x 1 3/8" Hex Bolt	4	130	7" Axle	1
113	M10 x 1 3/4" Allen Bolt	17	131	Ø 1 1/2" x Ø 5/8" Washer	2
114	M10 x 1" Allen Bolt	4	132	Ø 1 1/2" x Ø 1" Washer	2
115	M8 x 3 3/8" Allen Bolt	2	133	Ø 1 1/2" x Ø 1/2" Washer	4
116	M10 x 3" Allen Bolt	1	134	Short Chain	2
117	M10 x 2 1/2" Allen Bolt	5	135	Long Chain	1
118	Ø 3/4" Bushing	2	136	C-clip	6
119	M10 x 1 3/4" Allen Bolt (Full Thread)	1	137	4" L-shaped Pin	1
120	M10 x 3/4" Allen Bolt	13	138	3" L-shaped Pin	1
121	M8 x 5/8" Allen Bolt	2	139	M10 x 2 1/2" Axle	1
122	M8 x 3/4" Allen Bolt	4	140	M6 x 3/4" Adjustment Screw	2
123	M6 x 5/8" Allen Bolt	3	141	M6 x 1/2" Adjustment Nut	2
124	Ø 3/4" Washer	84	142	1 3/4" Square End Cap	2
125	Ø 5/8" Washer	8	143	Ø 1 1/2" End Cap	2
126	Ø 1/2" Washer	4	144	Ø 1" End Cap	2
127	M12 Aircraft Nut	4	145	Ø 1 1/4" End Cap	2
			146	Ø 1 5/8" x 1 1/2" Bushing	2
			147	Ø 1 5/8" x 5/8" Bushing	1

MACH IV WEIGHT RESISTANCE CHART

Plate	Arm Curl	Low Pulley	High Pulley	Butterfly	AB Station	Bench Press
0	40	30	20	20	30	60
1	50	40	30	23	40	70
2	60	50	40	26	50	80
3	70	60	50	29	60	90
4	80	70	60	32	70	100
5	90	80	70	35	80	110
6	100	90	80	38	90	120
7	110	100	90	41	100	130
8	120	110	100	44	110	140
9	130	120	110	47	120	150
10	140	130	120	50	130	160
11	150	140	130	53	140	170
12	160	150	140	56	150	180
13	170	160	150	59	160	190
14	180	170	160	62	170	200
15	190	180	170	65	180	210
16	200	190	180	68	190	220
17	210	200	190	71	200	230
18	220	210	200	74	210	240
19	230	220	210	77	220	250

* Numbers are approximate. Actual weights may vary.

* Values for Butterfly are for each arm.

IMPEX INC.

LIMITED WARRANTY

IMPEX Inc. ("IMPEX") warrants this product to be free from defects in workmanship and material, under normal use and service conditions, for a period of two years on the Frame from the date of purchase. This warranty extends only to the original purchaser. IMPEX's obligation under this Warranty is limited to replacing or repairing, at IMPEX's option.

All returns must be pre-authorized by IMPEX. Pre-authorization may be obtained by calling IMPEX Customer Service Department at 1-800-999-8899. All freights on products returned to IMPEX must be prepaid by the customer. This warranty does not extend to any product or damage to a product caused by or attributable to freight damage, abuse, misuse, improper or abnormal usage or repairs not provided by an IMPEX authorized service center or for products used for commercial or rental purposes. No other warranty beyond that specifically set forth above is authorized by IMPEX.

IMPEX is not responsible or liable for indirect, special or consequential damages arising out of or in connection with the use or performance of the product or other damages with respect to any economic loss, loss of property, loss of revenues or profits, loss of enjoyments or use, costs of removal, installation or other consequential damages or whatsoever natures. Some states do not allow the exclusion or limitation of incidental or consequential damages. Accordingly, the above limitation may not apply to you.

The warranty extended hereunder is in lieu of any and all other warranties and any implied warranties of merchantability or fitness for a particular purpose is limited in its scope and duration to the terms set forth herein. Some states do not allow limitations on how long an implied warranty lasts. Accordingly, the above limitation may not apply to you.

This warranty gives you specific legal right. You may also have other rights which vary from state to state. **Register on-line www.impex-fitness.com**

**IMPEX INC.
14777 Don Julian
City of Industry, CA 91746**

ORDERING REPLACEMENT PARTS

Replacement parts can be ordered by calling our Customer Service Department toll-free at **1-800-999-8899** during our regular business hours: Monday through Friday, 9 am until 5 pm Pacific standard time.

info@impex-fitness.com

When ordering replacement parts, always give the following information.

1. Model
2. Description of Parts
3. Part Number
4. Date of Purchase